
Revision History

Version	Date	By	Change Dsecription	Approved
V1.0	2025-12-17		1: Draft version;	

Rockchip Confidential

Rockchip Electronics Co., Ltd					
Project:	DshanPI-A1-CM5				
File:	01.Revision History				
Date:	Friday, May 08, 2026			Rev:	V1.0
Designed by:	Wesley Huang	Reviewed by:		Sheet:	1 of 24

RK3576 Ref Block Diagram(Typical Application Case)

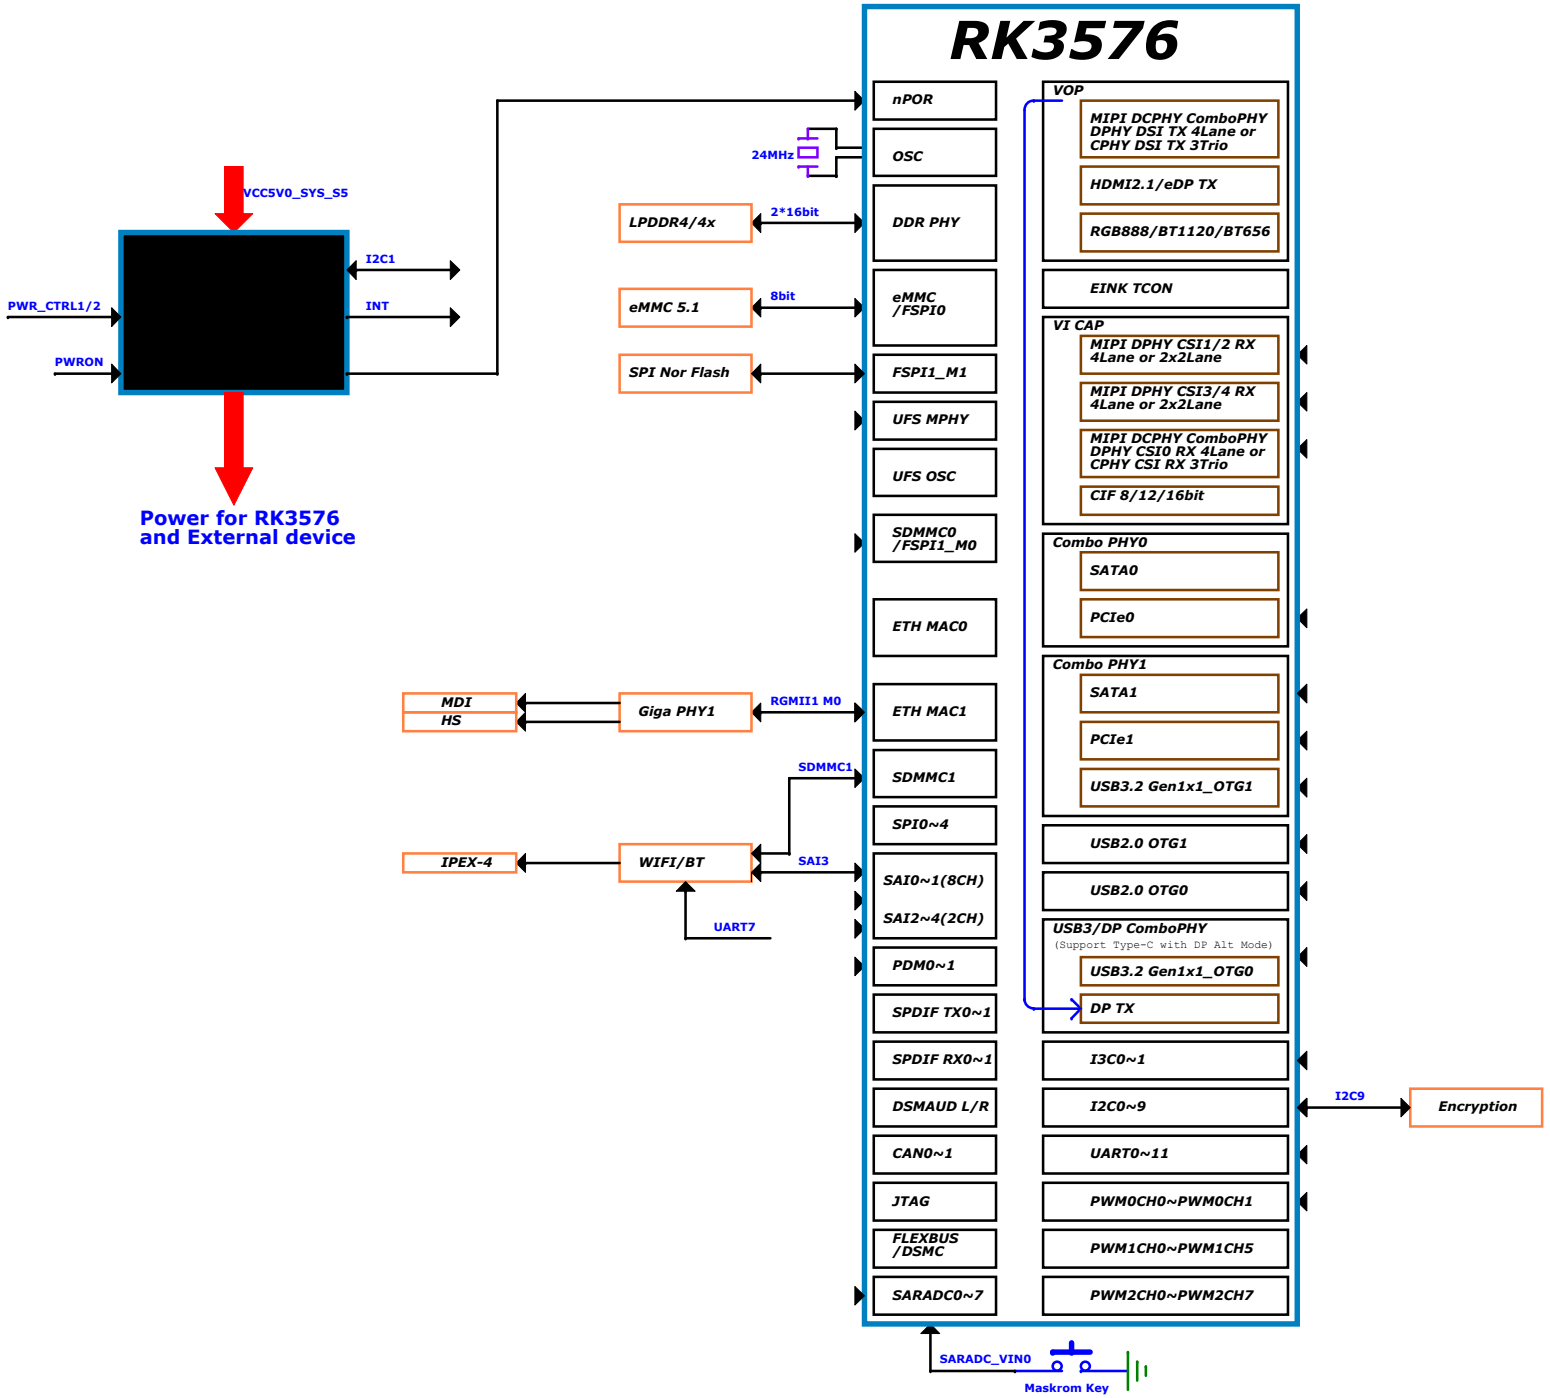


Rockchip Confidential

Rockchip	Rockchip Electronics Co., Ltd		
Project:	DshanPI-A1-CM5		
File:	02.Block Diagram		
Date:	Friday, May 08, 2026	Rev:	V1.0
Designed by:	Wesley Huang	Reviewed by:	Sheet: 2 of 24

Power Tree

Note:
The RK806S-5 LDO power distribution of the reference schematic is only suitable for the interface used in the reference schematic. If other interface functions need to be added to the reference schematic, the RK806S-5 LDO distribution needs to be re evaluated, otherwise the added functions may exceed the maximum current provided by the LDO

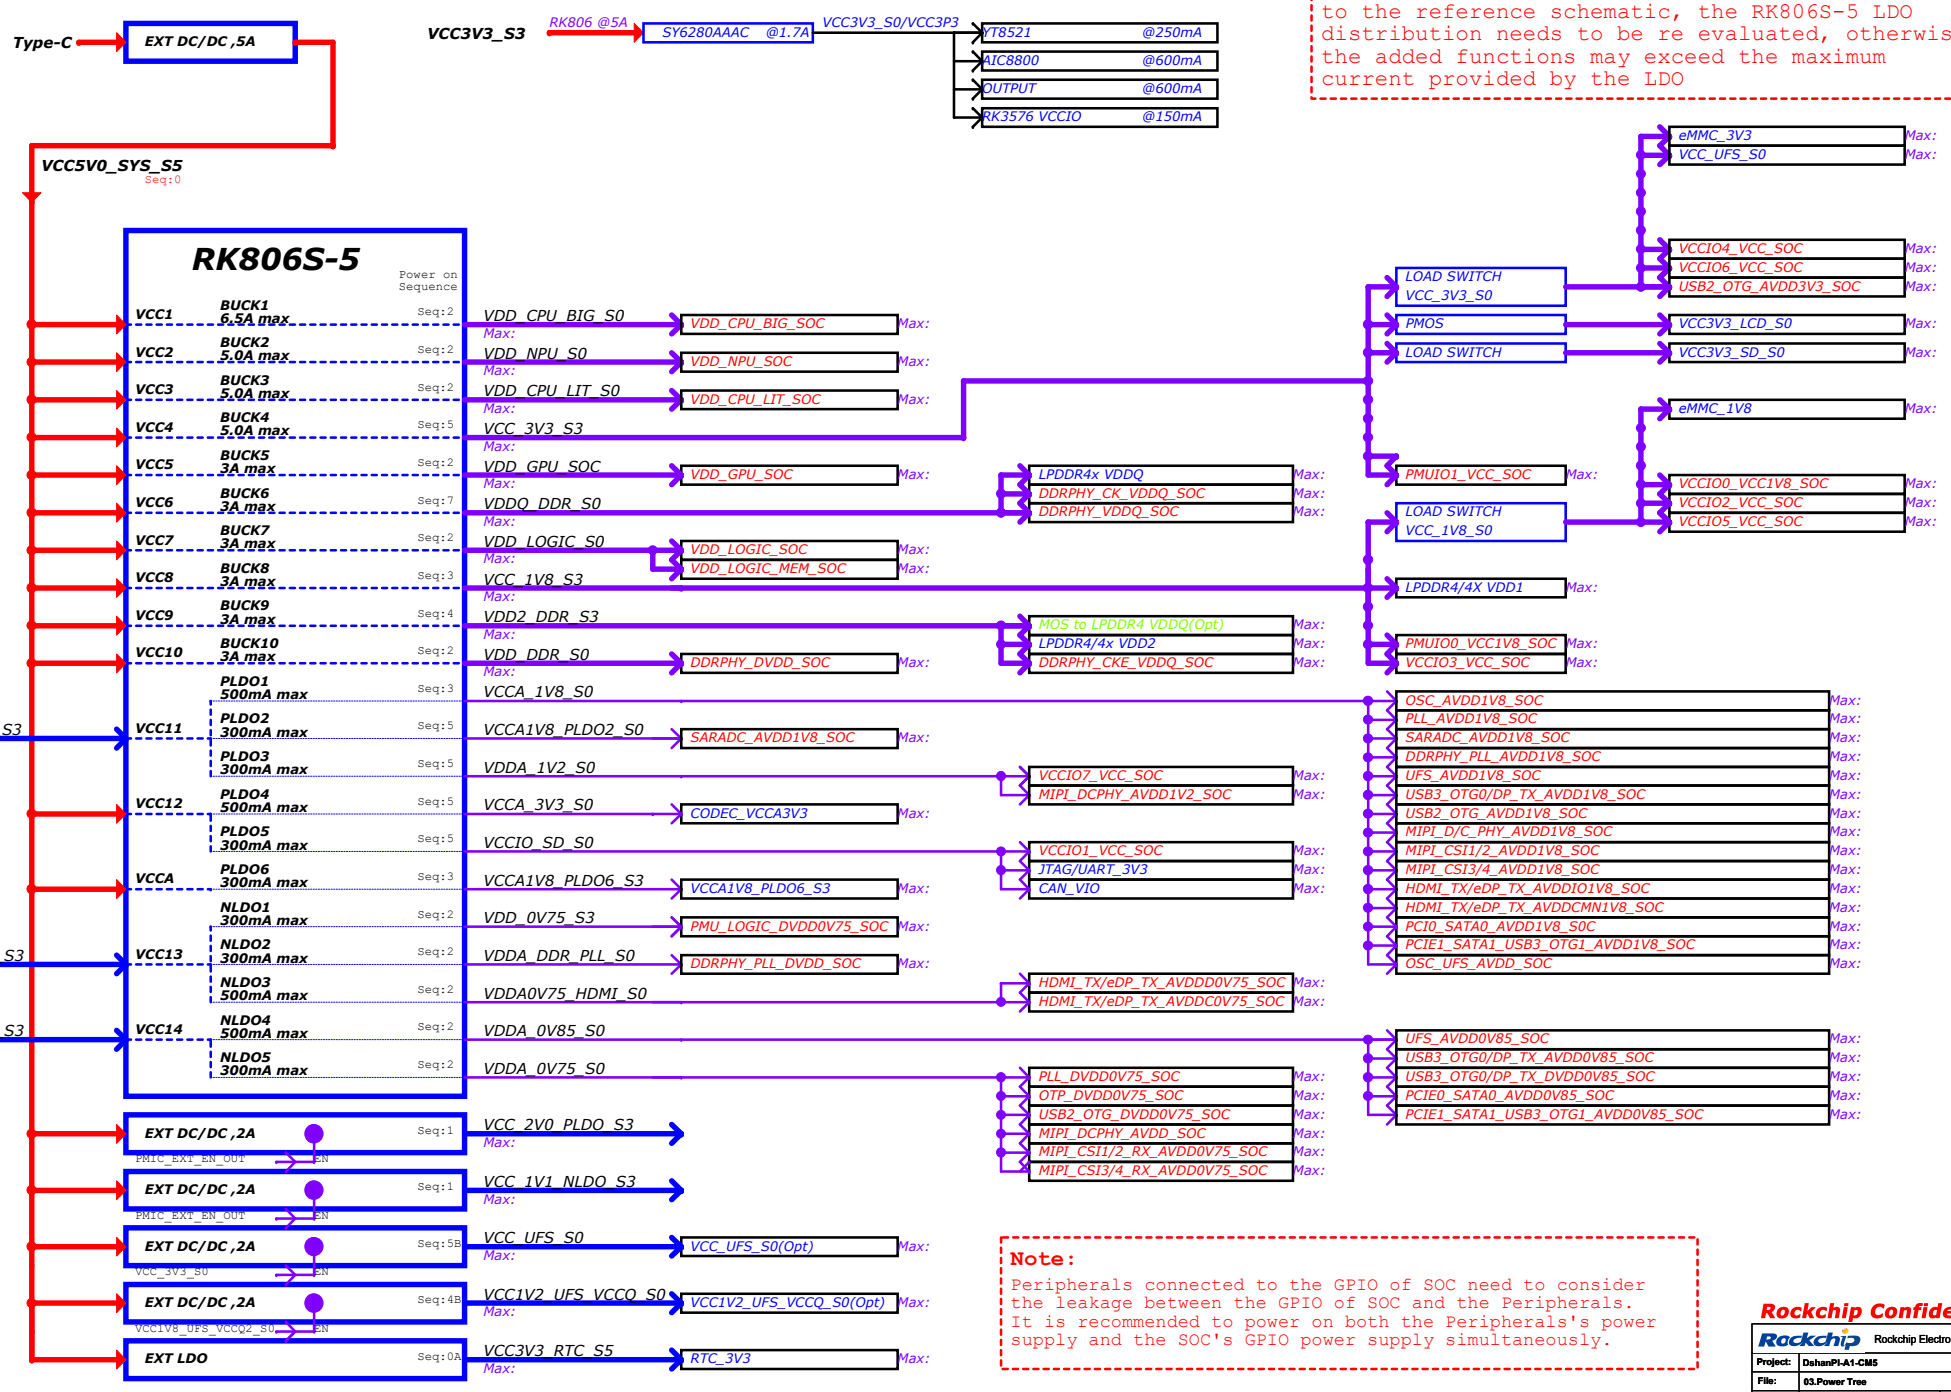


Note:
Peripherals connected to the GPIO of SOC need to consider the leakage between the GPIO of SOC and the Peripherals. It is recommended to power on both the Peripherals's power supply and the SOC's GPIO power supply simultaneously.

Rockchip Confidential

Rockchip	Rockchip Electronics Co., Ltd
Project:	DshanPI-A1-CM5
File:	03.Power Tree
Date:	Friday, May 08, 2026
Rev:	V1.0
Designed by:	Wesley Huang
Reviewed by:	
Sheet:	3 of 24

Power Sequence

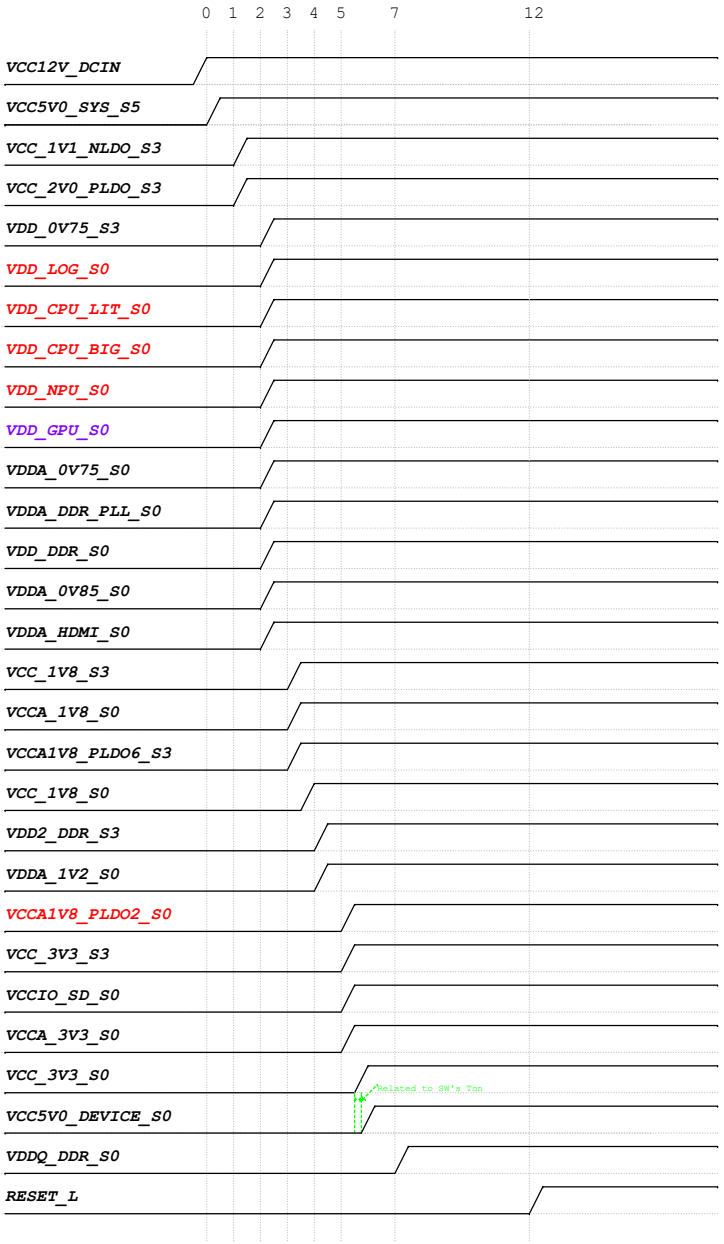

Power description

Power Supply	PMIC Channel	Supply Limit	Power Name	Time Slot	Default Voltage	Default ON/OFF	Work Voltage	Peak Current	Sleep Current
VCC5V0_SYS_S5	RK806_BUCK1	6.5A	VDD_CPU_BIG_S0	Slot:2	0.85V	ON	DVFS	TBD	TBD
VCC5V0_SYS_S5	RK806_BUCK2	5A	VDD_NPU_S0	Slot:2	0.75V	ON	DVFS	TBD	TBD
VCC5V0_SYS_S5	RK806_BUCK3	5A	VDD_CPU_LIT_S0	Slot:2	0.85V	ON	DVFS	TBD	TBD
VCC5V0_SYS_S5	RK806_BUCK4	5A	VCC_3V3_S3	Slot:5	3.3V	ON	3.3V	TBD	TBD
VCC5V0_SYS_S5	RK806_BUCK5	3A	VDD_GPU_S0	Slot:2	ADJ FB=0.5V	ON	DVFS	TBD	TBD
VCC5V0_SYS_S5	RK806_BUCK6	3A	VDDQ_DDR_S0	Slot:7	ADJ FB=0.5V	ON	0.61V-LP4/4x 0.51V-LP5	TBD	TBD
VCC5V0_SYS_S5	RK806_BUCK7	3A	VDD_LOGIC_S0 VDD_LOGIC_MEM_S0	Slot:2	0.75V	ON	0.75V	TBD	TBD
VCC5V0_SYS_S5	RK806_BUCK8	3A	VCC_1V8_S3	Slot:3	1.8V	ON	1.8V	TBD	TBD
VCC5V0_SYS_S5	RK806_BUCK9	3A	VDD2_DDR_S3	Slot:4	ADJ FB=0.5V	ON	1.1V-LP4/4x 1.05V-LP5	TBD	TBD
VCC5V0_SYS_S5	RK806_BUCK10	3A	VDD_DDR_S0	Slot:2	0.85V	ON	0.85V DVFS	TBD	TBD
VCC_2V0_PLDO	RK806_PLDO1	0.5A	VCCA_1V8_S0	Slot:3	1.8V	ON	1.8V	TBD	TBD
	RK806_PLDO2	0.3A	VCCA1V8_PLDO2_S0	Slot:5	1.8V	ON	1.8V	TBD	TBD
	RK806_PLDO3	0.3A	VDDA_1V2_S0	Slot:4	1.2V	ON	1.2V	TBD	TBD
VCC5V0_SYS_S5	RK806_PLDO4	0.5A	VCCA_3V3_S0	Slot:5	3.0V	ON	3.3V	TBD	TBD
	RK806_PLDO5	0.3A	VCCIO_SD_S0	Slot:5	3.3V	ON	3.3V	TBD	TBD
VCC5V0_SYS_S5	RK806_PLDO6	0.3A	VCCA1V8_PLDO6_S3	Slot:3	1.8V	ON	1.8V	TBD	TBD
VCC_1V1_NLDO	RK806_NLDO1	0.3A	VDD_0V75_S3	Slot:2	0.75V	ON	0.75V	TBD	TBD
	RK806_NLDO2	0.3A	VDDA_DDR_PLL_S0	Slot:2	0.85V	ON	0.85V DVFS	TBD	TBD
	RK806_NLDO3	0.5A	VDDA0V75_HDMI_S0	Slot:2	0.75V	ON	0.75V	TBD	TBD
VCC_1V1_NLDO	RK806_NLDO4	0.5A	VDDA_0V85_S0	Slot:2	0.85V	ON	0.85V	TBD	TBD
	RK806_NLDO5	0.3A	VDDA_0V75_S0	Slot:2	0.75V	ON	0.75V	TBD	TBD
	RK806_RESETn								
VCC5V0_SYS_S5	EXT BUCK	2A	VCC_2V0_PLDO_S3	Slot:1	2.1V	ON	2.0V	TBD	TBD
VCC5V0_SYS_S5	EXT BUCK	2A	VCC_1V1_NLDO_S3	Slot:1	1.1V	ON	1.1V	TBD	TBD
VCC12V_DCIN	EXT BUCK	5A	VCC5V0_SYS_S5	Slot:0	5.0V	ON	5.0V	TBD	TBD
VCC12V_DCIN	EXT BUCK	3A	VCC5V0_DEVICE_S0	Slot:5A	5.2V	ON	5.2V	TBD	TBD
VCC_3V3_S3	SWITCH	2A	VCC_3V3_S0	Slot:5A	3.3V	ON	3.3V	TBD	TBD
VCC_1V8_S3	SWITCH	2A	VCC_1V8_S0	Slot:3A	1.8V	ON	1.8V	TBD	TBD

Note:

The power suffix S0, S3 or S5 means:
S5: Keep power on during power down
S3: Keep power on during sleeping
S0: Power off during sleeping

Note:

Peripherals connected to the GPIO of SOC need to consider the leakage between the GPIO of SOC and the Peripherals. It is recommended to power on both the Peripherals's power supply and the SOC's GPIO power supply simultaneously.

IO Power Domain Map

IO Domain	Pin Num	Support IO Voltage	Supply Power Pin Name	Power Source	Operating Voltage
PMUIO0	Pin 2K11	1.8V Only	PMUIO0_VCC1V8	VCC_1V8	1.8V
PMUIO1	Pin 1U20	1.8V or 3.3V	PMUIO1_VCC	VCC_1V8 VCC_3V3	3.3V
VCCIO0	Pin 1J20	1.8V Only	VCCIO0_VCC1V8	VCC_1V8	1.8V
VCCIO1	Pin 2A8	1.8V or 3.3V	VCCIO1_VCC	VCC_1V8 VCC_3V3	1.8V/3.3V
VCCIO2	Pin 2A2	1.8V or 3.3V	VCCIO2_VCC	VCC_1V8 VCC_3V3	1.8V
VCCIO3	Pin 2B10	1.8V or 3.3V	VCCIO3_VCC	VCC_1V8 VCC_3V3	1.8V
VCCIO4	Pin 2A7	1.8V or 3.3V	VCCIO4_VCC	VCC_1V8 VCC_3V3	3.3V
VCCIO5	Pin 2A4/2A5	1.8V or 3.3V	VCCIO5_VCC	VCC_1V8 VCC_3V3	1.8V
VCCIO6	Pin 2N3	1.8V or 3.3V	VCCIO6_VCC	VCC_1V8 VCC_3V3	3.3V
VCCIO7	Pin 2M3	1.2V or 1.8V	VCCIO7_VCC	VCC_1V2 VCC_1V8	1.2V


IO Type	Operating Voltage
1.8V Only	VCCIO*_VCC1V8=1.8V
1.2V or 1.8V	VCCIO*_VCC=1.2V or 1.8V
1.8V or 3.3V	VCCIO*_VCC=1.8V or 3.3V

Rockchip Confidential


Rockchip	Rockchip Electronics Co., Ltd		
Project:	DshanPI-A1-CM5		
File:	04.Power Sequence and Map		
Date:	Friday, May 08, 2026	Rev:	V1.2
Designed by:	Wesley Huang	Reviewed by:	Sheet: 4 of 24

MULTI_PHY Path Map

USBDP PHY--USB3.2 GEN1X1 OTG0/DP1.4

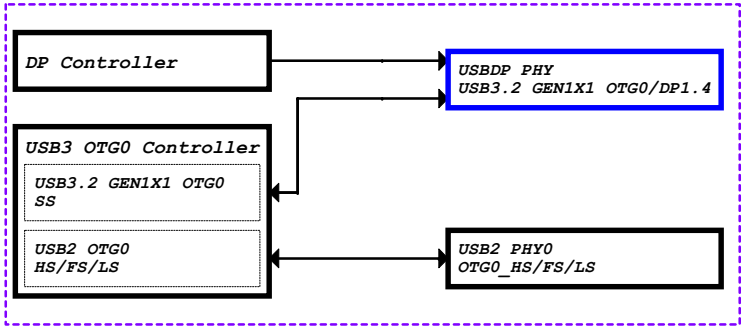


PCIe Combo PHY1--
PCIe1/SATA1/USB3.2 GEN1X1 OTG1

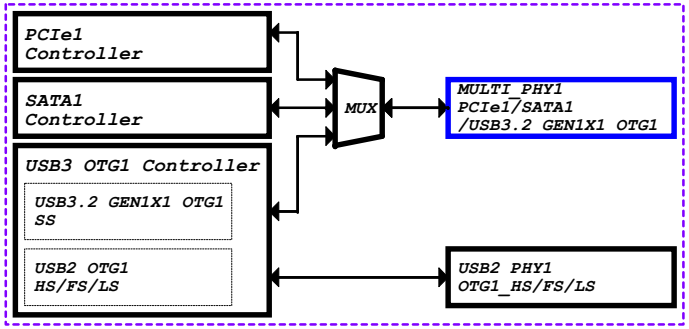


Note:
USB2 OTG1 can only be used when PCIE1/SATA1 is not in use!!!

USB OTG0/DP Application


CASE0: TYPEC with DP

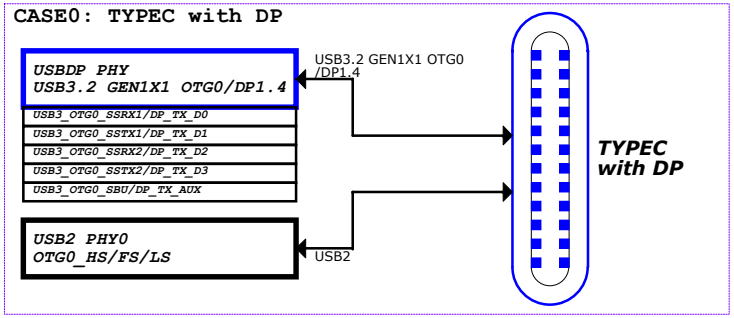


CASE1: USB2 OTG0 + DP 4Lane(Swap OFF)

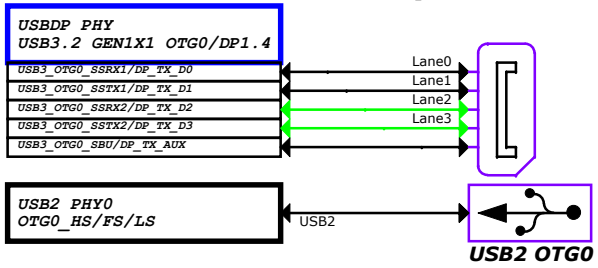


CASE2: USB2 OTG0 + DP 4Lane(Swap ON)

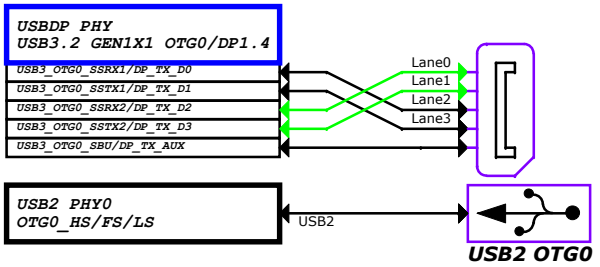

CASE3: USB3.2 GEN1X1 OTG0 + DP 2Lane(Swap OFF)

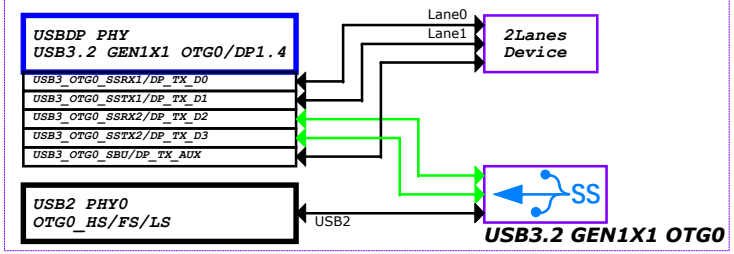


CASE4: USB3.2 GEN1X1 OTG0 + DP 2Lane(Swap ON)

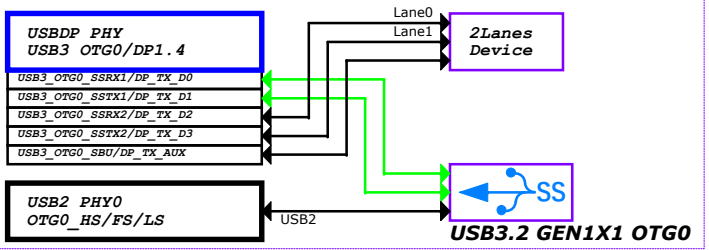


Note:
DP Lane swap enable
0:Lane0/1/2/3 TxData mapping to Lane0/1/2/3_TXDP/N
1:Lane0/1/2/3 TxData mapping to Lane2/3/0/1_TXDP/N

USB OTG1 Application

CASE0: USB2 OTG1

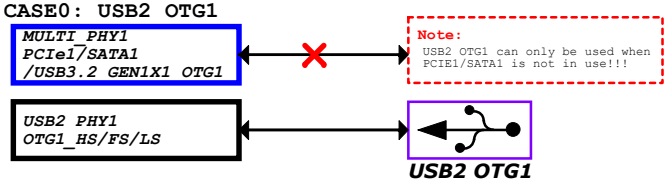


CASE1: USB3.2 GEN1X1 OTG1

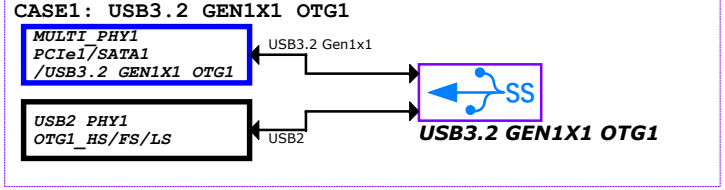


Rockchip Confidential

Rockchip	Rockchip Electronics Co., Ltd
Project:	DshanPI-A1-CM5
File:	05.USB/DP Configure Map
Date:	Friday, May 08, 2020
Rev:	V1.0
Designed by:	Wesley Huang
Reviewed by:	
Sheet:	5 of 24


PCIe Combo PHY0--PCIe0/SATA0

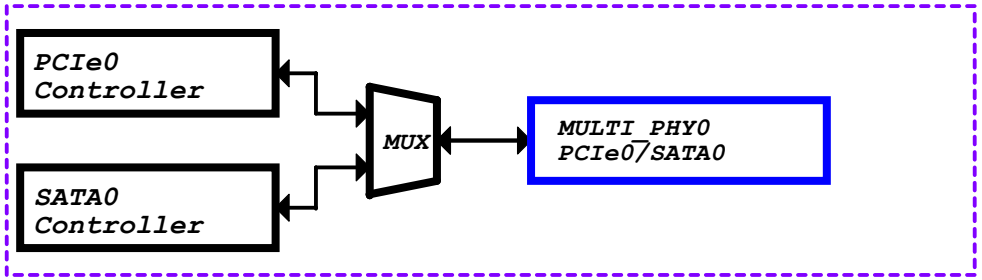


CASE0: PCIe x 1Lane

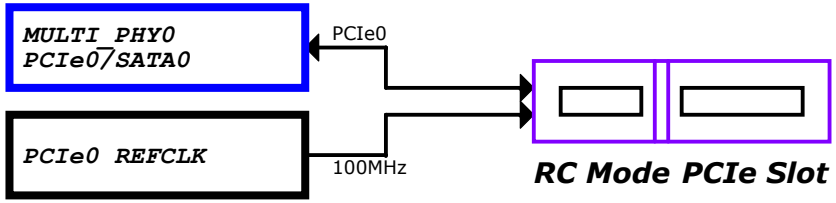


CASE1: SATA




PCIe Combo PHY1--
PCIe1/SATA1/USB3.2 GEN1X1 OTG1

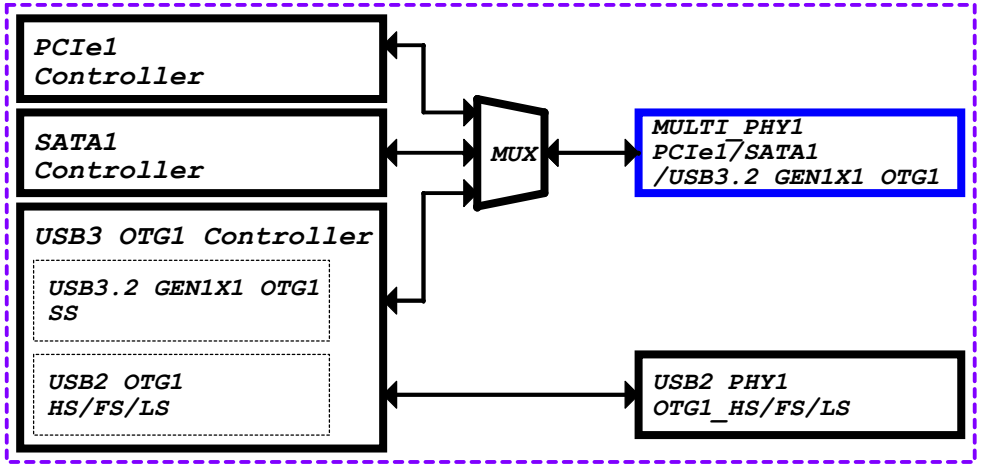


CASE0: PCIe x 1Lane

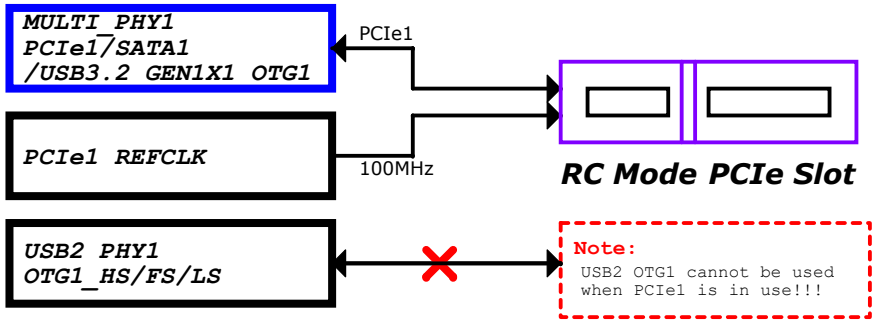

CASE1: SATA

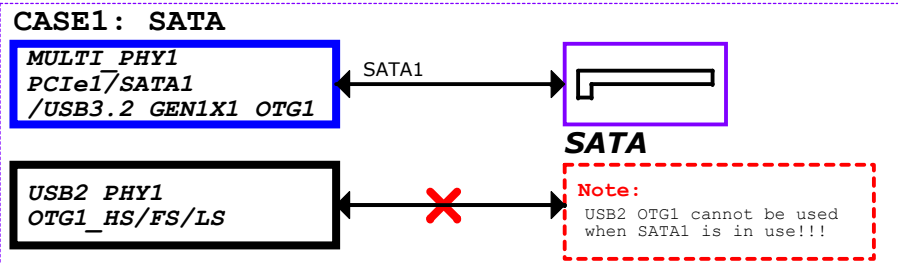


CASE2: USB3.2 GEN1X1 OTG1

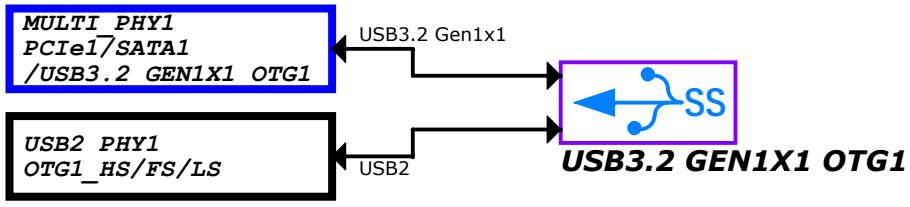

Rockchip Confidential


Rockchip Electronics Co., Ltd					
Project:	DshanPI-A1-CM5				
File:	06.PCIe Combo PHY Configure Map				
Date:	Friday, May 08, 2026			Rev:	V1.0
Designed by:	Wesley Huang	Reviewed by:		Sheet:	6 of 24

RK3576_S (Power)

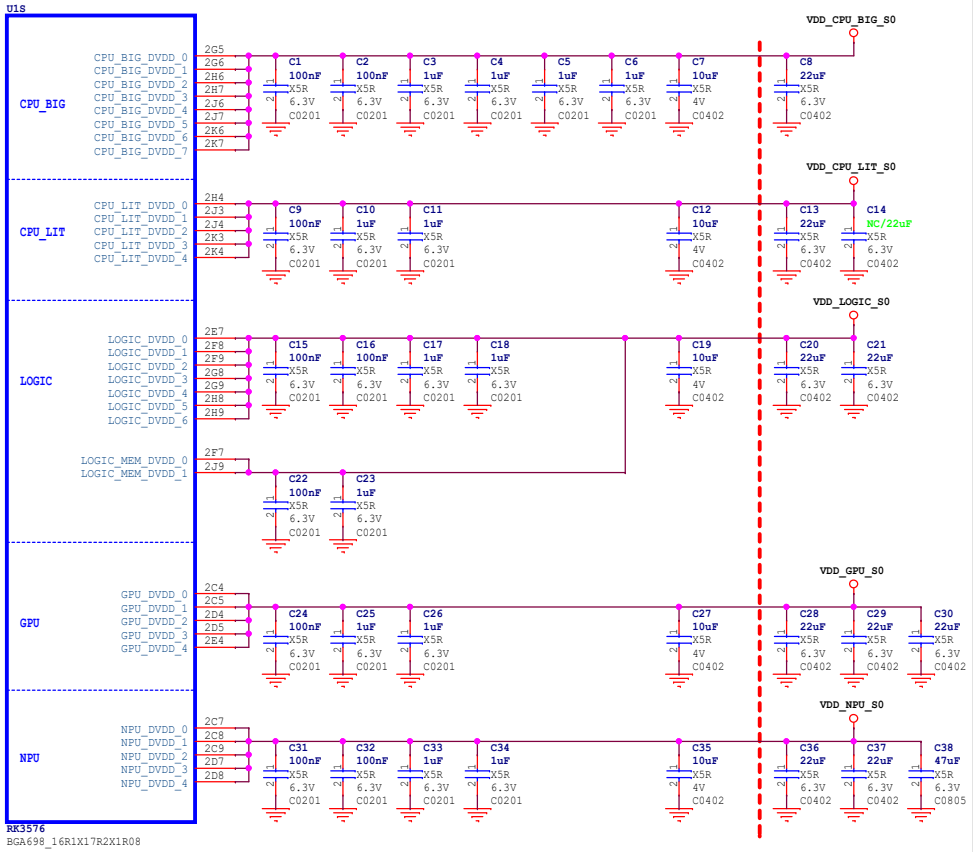

Note:
Caps of between dashed red lines and U1000 should be placed under the U1000 package.
Other caps should be placed close to the U1000 package


RK3576_T/U/V (GND)

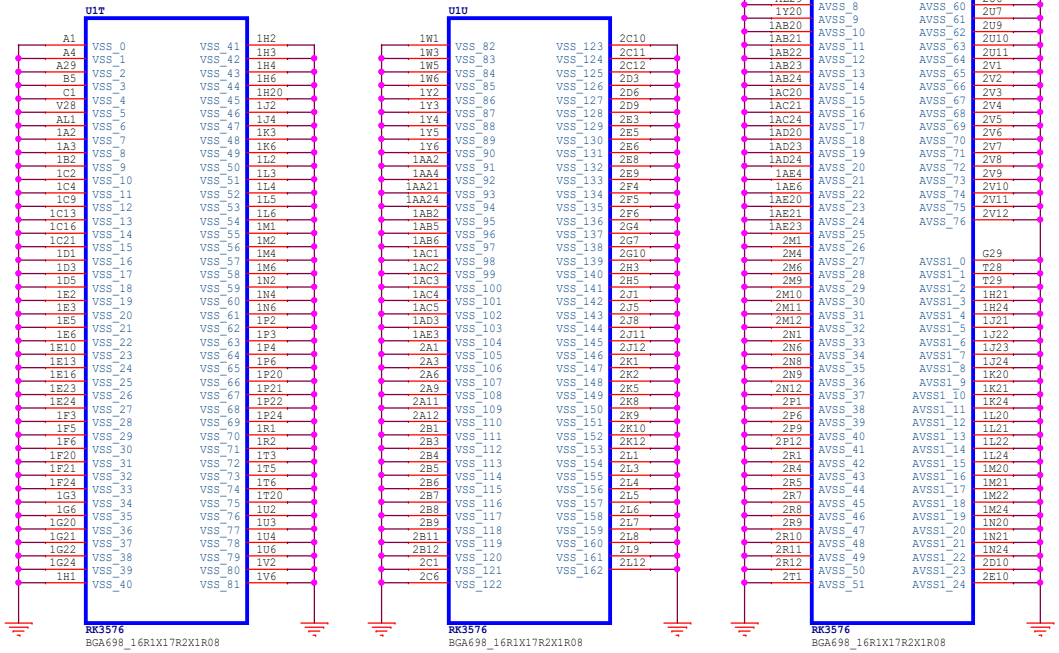


Rockchip Confidential

Rockchip	Rockchip Electronics Co., Ltd		
Project:	DshanPI-A1-CM5		
File:	07.RK3576-Power/GND		
Date:	Friday, May 08, 2026	Rev:	V1.0
Designed by:	Wesley Huang / Reviewed by:	Sheet:	7 of 24

RK3576_E (PMUIO0/1)

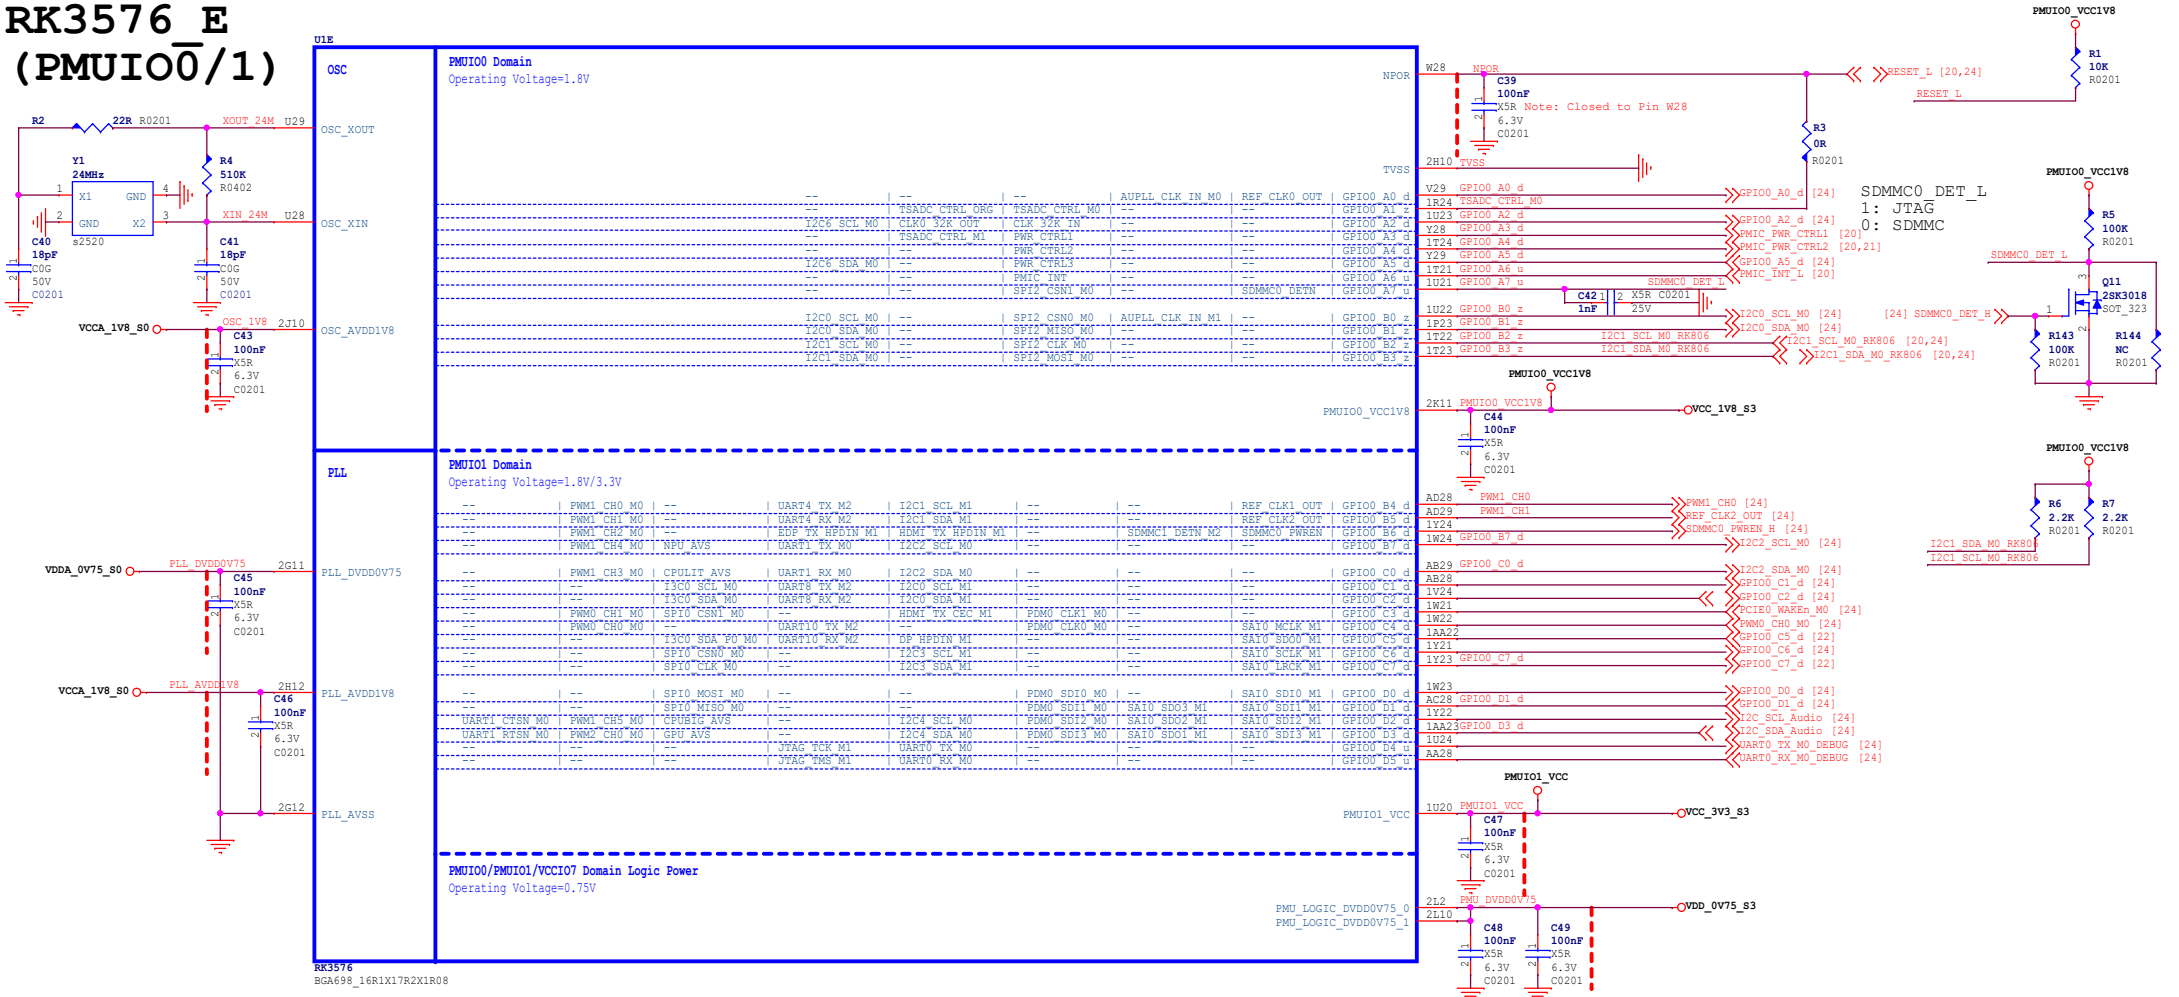

RK3576_R (SARADC)

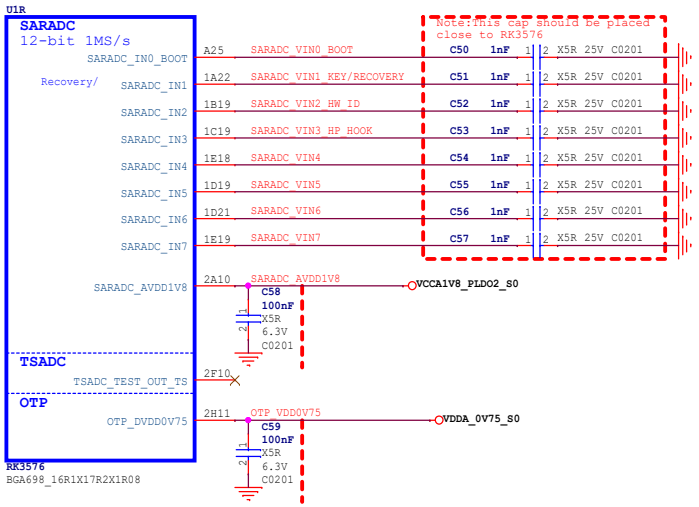

Note:
Caps of between dashed red lines and U1000 should be placed under the U1000 package.
Other caps should be placed close to the U1000 package

BOOT MODE CONFIG


Config Table for SARADC_VIN0_BOOT

Item	Rup	Rdown	ADC Value	Boot Mode
Config1	NC	10K	0	USB (Maskrom mode)
Config2	10K	1.13K	416	FSPI0->USB
Config3	10K	2.49K	816	FSPI1_M0->EMMC->USB
Config4	10K	4.3K	1231	FSPI1_M1->EMMC->USB
Config5	10K	6.8K	1658	FSPI0->UFS->USB
Config6	10K	10K	2048	FSPI1_M0->UFS->USB
Config7	10K	14.7K	2437	UFS->USB
Config8	10K	23.2K	2862	UFS->SDMMC0->USB
Config9	10K	40.2K	3279	RFU
Config10	10K	88.7K	3680	EMMC->SDMMC0->USB
Config11	10K	NC	4095	EMMC->USB


Rockchip Confidential

Rockchip	Rockchip Electronics Co., Ltd
Project:	DshanPI-A1-CM5
File:	08.RK3576-OSC/PLL/PMUIO/SARADC
Date:	Friday, May 08, 2026
Rev:	V1.0
Designed by:	Wesley Huang
Reviewed by:	
Sheet:	8 of 24

RK3576_A(DDRPHY)

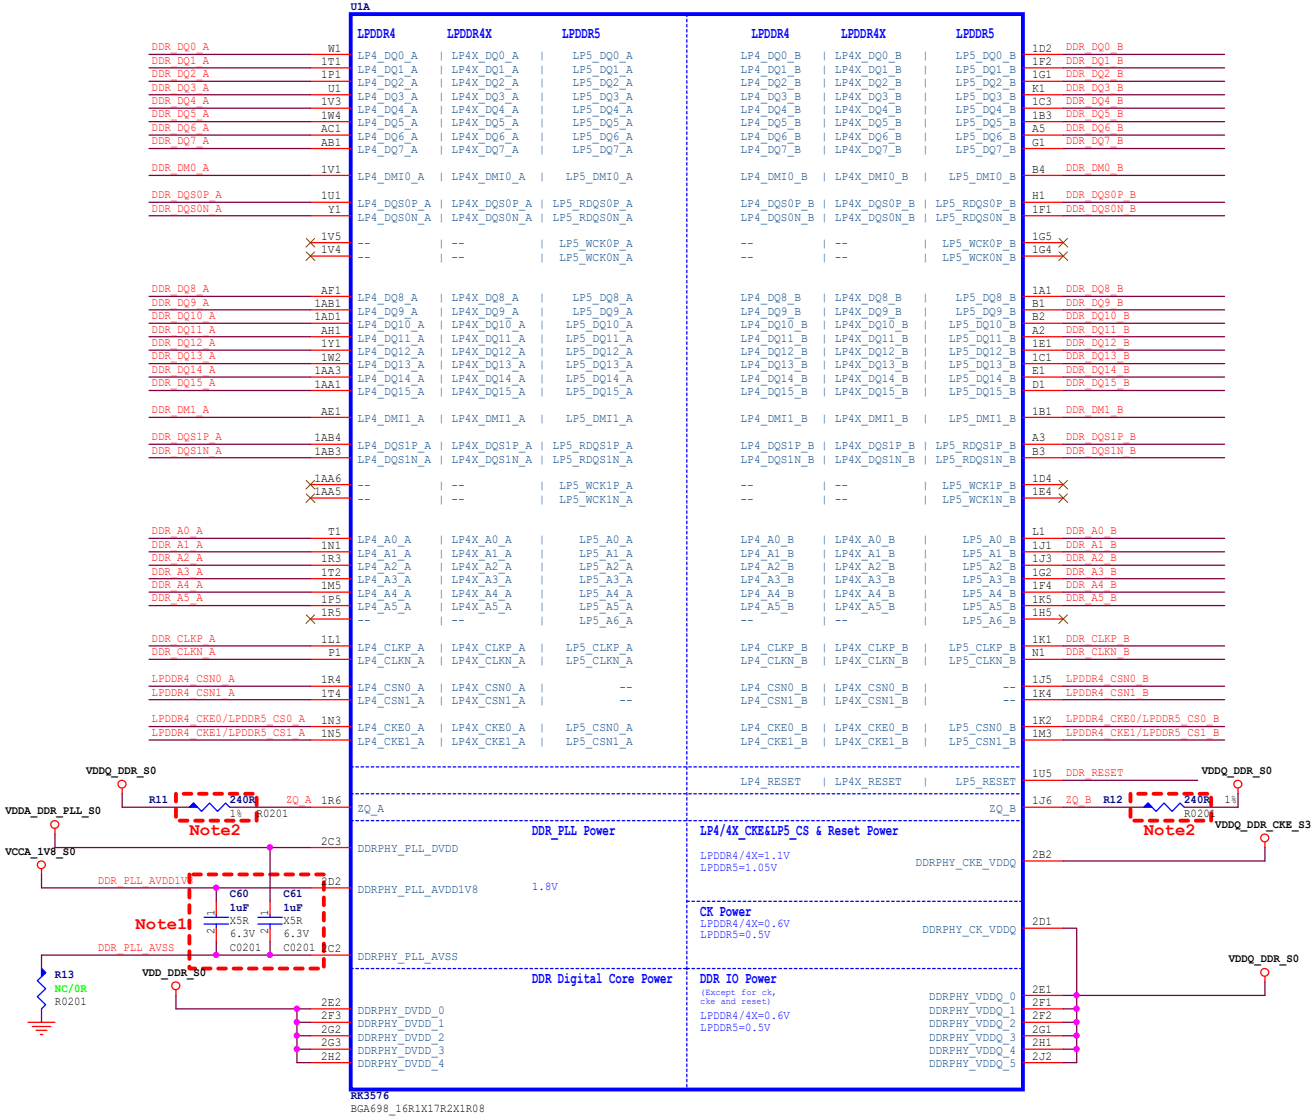


LPDDR4 Signal

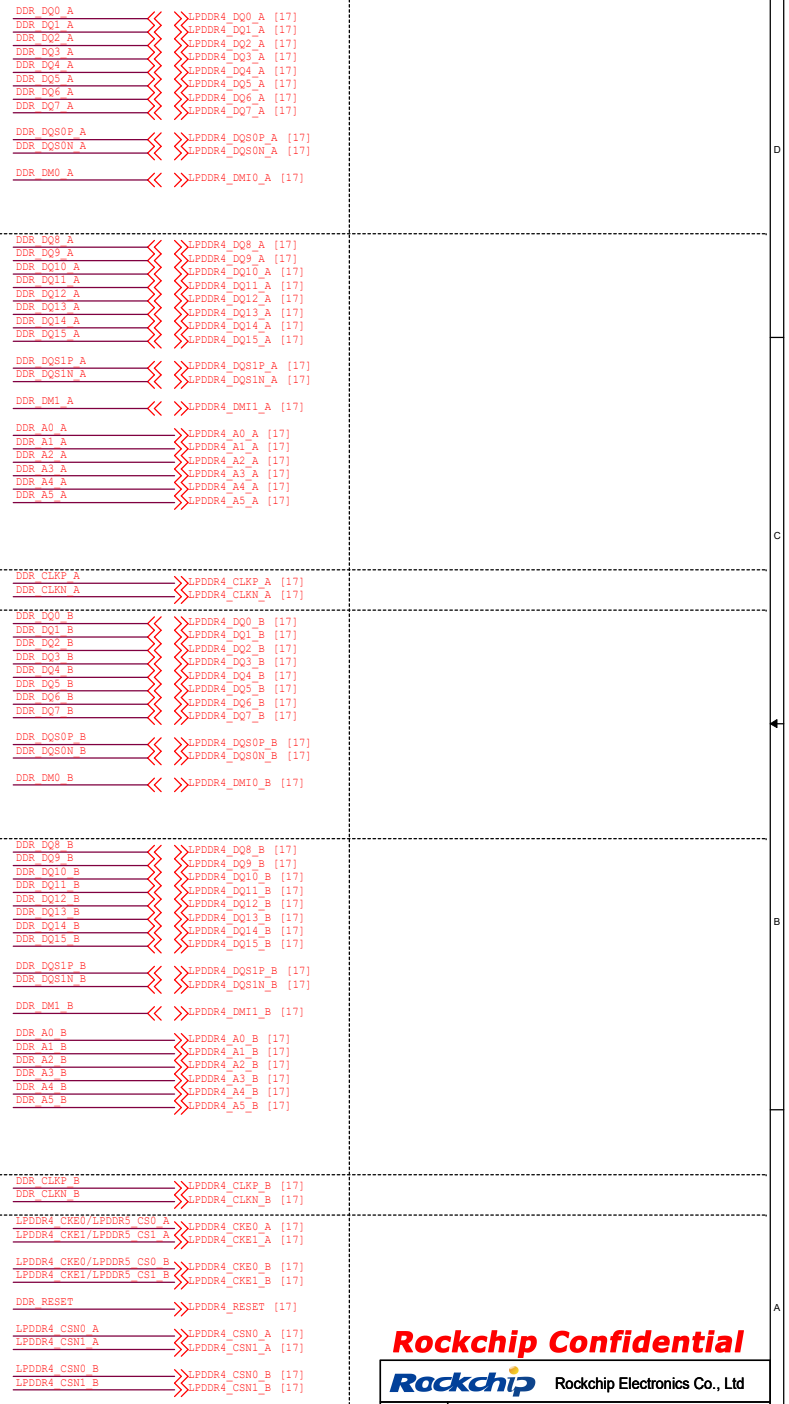


Rockchip Confidential

Rockchip	Rockchip Electronics Co., Ltd		
Project:	DshanPI-A1-CM5		
File:	09.RK3576-DDR PHY		
Date:	Friday, May 08, 2026	Rev:	V1.0
Designed by:	Wesley Huang / Reviewed by:	Sheet:	9 of 24


RK3576_B (UFS2.1)

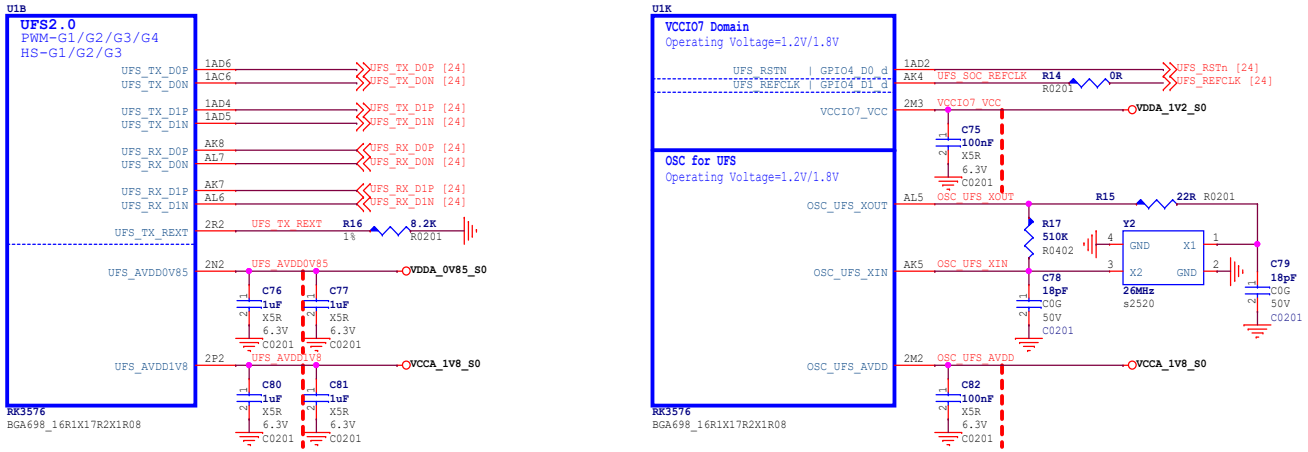

RK3576_C (VCCIO0)

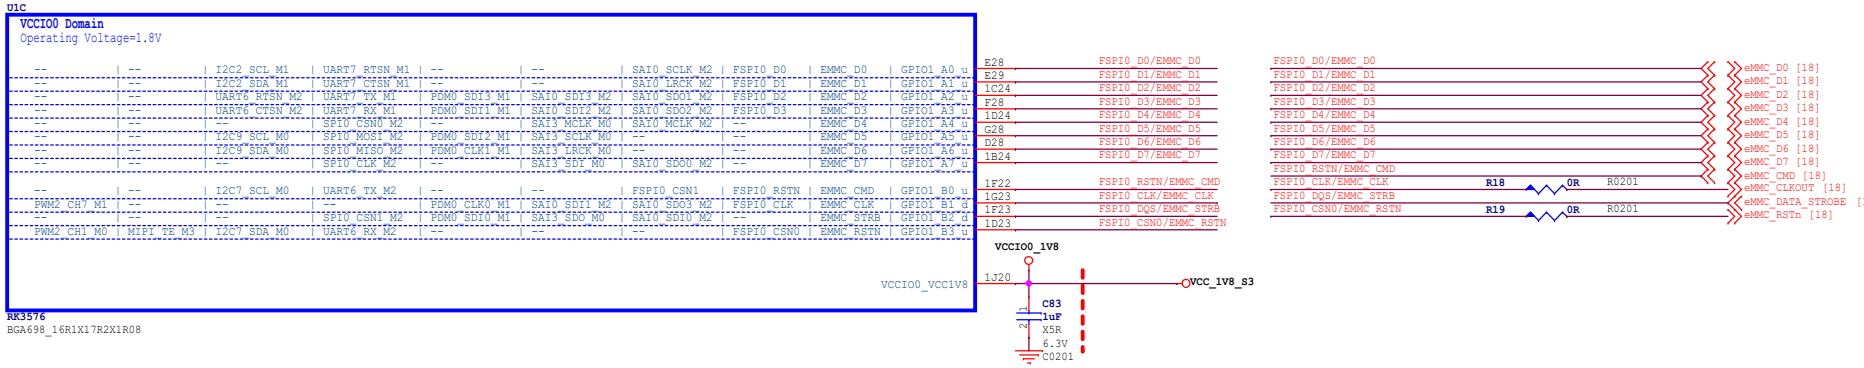

RK3576_D (VCCIO1)

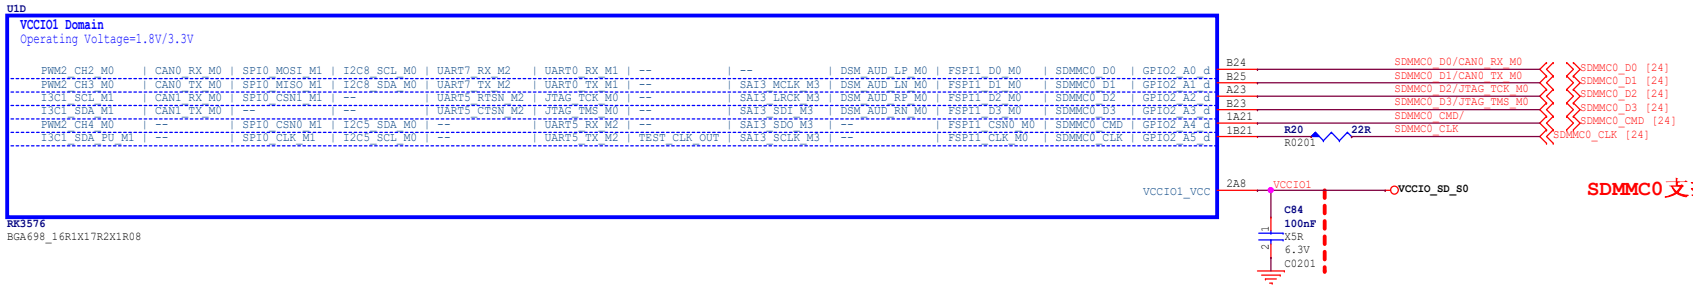

SDMMC0支持system boot

Note:
Caps of between dashed red lines and U1000 should be placed under the U1000 package. Other caps should be placed close to the U1000 package

Rockchip Confidential

Rockchip Electronics Co., Ltd					
Project:	DshanPI-A1-CM5				
File:	10.RK3576-eMMC/UFS/SD				
Date:	Friday, May 08, 2026			Rev:	V1.0
Designed by:	Wesley Huang	Reviewed by:		Sheet:	10 of 24

RK3576_L (USB3/DP)

U1L

USB3 OTG0/DP1.4 Alt
USB:USB3.2 Gen1x1 OTG0
DP :RBR/HBR/HBR2/HBR3

--	DP_TX_AUXP
--	DP_TX_AUXN
USB3_OTG0_SSRX1P	DP_TX_D0P
USB3_OTG0_SSRX1N	DP_TX_D0N
USB3_OTG0_SSTX1P	DP_TX_D1P
USB3_OTG0_SSTX1N	DP_TX_D1N
USB3_OTG0_SSRX2P	DP_TX_D2P
USB3_OTG0_SSRX2N	DP_TX_D2N
USB3_OTG0_SSTX2P	DP_TX_D3P
USB3_OTG0_SSTX2N	DP_TX_D3N
USB3_OTG0_REXT	DP_TX_REXT
USB3_OTG0_DP_TX_AVDD0V85	
USB3_OTG0_DP_TX_DVDD0V85	
USB3_OTG0_DP_TX_AVDD1V8	

RK3576
BGA698_16R1X17R2X1R08

Support:
Type-C With Displayport Alternate Mode

2T2 DP_TX_AUXP [24]
2T3 DP_TX_AUXN [24]
AK10 USB3_OTG0_SSRX1P/DP_TX_D0P [24]
AL10 USB3_OTG0_SSRX1N/DP_TX_D0N [24]
AL11 USB3_OTG0_SSTX1P/DP_TX_D1P [24]
AK11 USB3_OTG0_SSTX1N/DP_TX_D1N [24]
AK12 USB3_OTG0_SSRX2P/DP_TX_D2P [24]
AL12 USB3_OTG0_SSRX2N/DP_TX_D2N [24]
AL13 USB3_OTG0_SSTX2P/DP_TX_D3P [24]
AK13 USB3_OTG0_SSTX2N/DP_TX_D3N [24]

2T7 USB3_OTG0_DP_TX_REXT R21 8.2K 1% R0201
2M5 USB3_OTG0/DP_TX_AVDD0V85 → VDDA_0V85_S0
2N5
C85 1uF X5R 6.3V C0201
2N4 USB3_OTG0/DP_TX_AVDD1V8 → VCCA_1V8_S0
C86 1uF X5R 6.3V C0201

Note:
Caps of between dashed red lines and U1000 should be placed under the U1000 package. Other caps should be placed close to the U1000 package

RK3576_M (USB2)

U1M

USB2 OTG0
OTG/HOST/DEVICE
HS/FS/LS
Download Port

USB2_OTG0_DP	
USB2_OTG0_DM	
USB2_OTG0_ID	
USB2_OTG0_VBUSDET	
USB2_OTG0_REXT	

USB2 OTG1
OTG/HOST/DEVICE
HS/FS/LS

USB2_OTG1_DP	
USB2_OTG1_DM	
USB2_OTG1_ID	
USB2_OTG1_VBUSDET	
USB2_OTG1_REXT	
USB2_OTG_DVDD0V75	
USB2_OTG_AVDD1V8	
USB2_OTG_AVDD3V3	

RK3576
BGA698_16R1X17R2X1R08

40K
40K

AK9 USB2_OTG0_DP [24]
AL9 USB2_OTG0_DM [24]
2R6 USB2_OTG0_ID Note: There is an internal pull-up resistor connected to 1.8V → USB2_OTG0_ID [24]
2P3 → USB2_OTG0_VBUSDET [24]
C87 100nF X5R 10V C0201
2R3 USB2_OTG0_REXT R22 200R 1% R0201

2T4 USB2_HOST1_DP [24]
2T5 USB2_HOST1_DM [24]
2T9 USB2_OTG1_ID R23 10K 5% R0201
2T10 USB2_OTG1_VBUSDET
2U8 USB2_OTG1_REXT R25 200R 1% R0201
C88 100nF X5R 10V C0201
VCC5V0_SYS_S5
R26 NC/20K R0402
R24 NC/10K R0201
Option: For test


2P5 USB2_OTG_DVDD0V75 → VDDA_0V75_S0
C89 100nF X5R 6.3V C0201
2P4 USB2_OTG_AVDD1V8 → VCCA_1V8_S0
C90 100nF X5R 6.3V C0201
C91 NC/1uF X5R 6.3V C0201
2P7 USB2_OTG_AVDD3V3 → VCC_3V3_S0
C92 100nF X5R 6.3V C0201

Note!!!
The USB2 OTG1 function cannot be used, if the PCIe1 or SATA1 function of Combo PHY1 is selected

Rockchip Confidential


Rockchip Electronics Co., Ltd			
Project:	DshanPI-A1-CM5		
File:	11.RK3576-TypeC/USB		
Date:	Friday, May 08, 2026	Rev:	V1.0
Designed by:	Wesley Huang	Reviewed by:	Sheet: 11 of 24

RK3576_O(MIPI DCPHY)

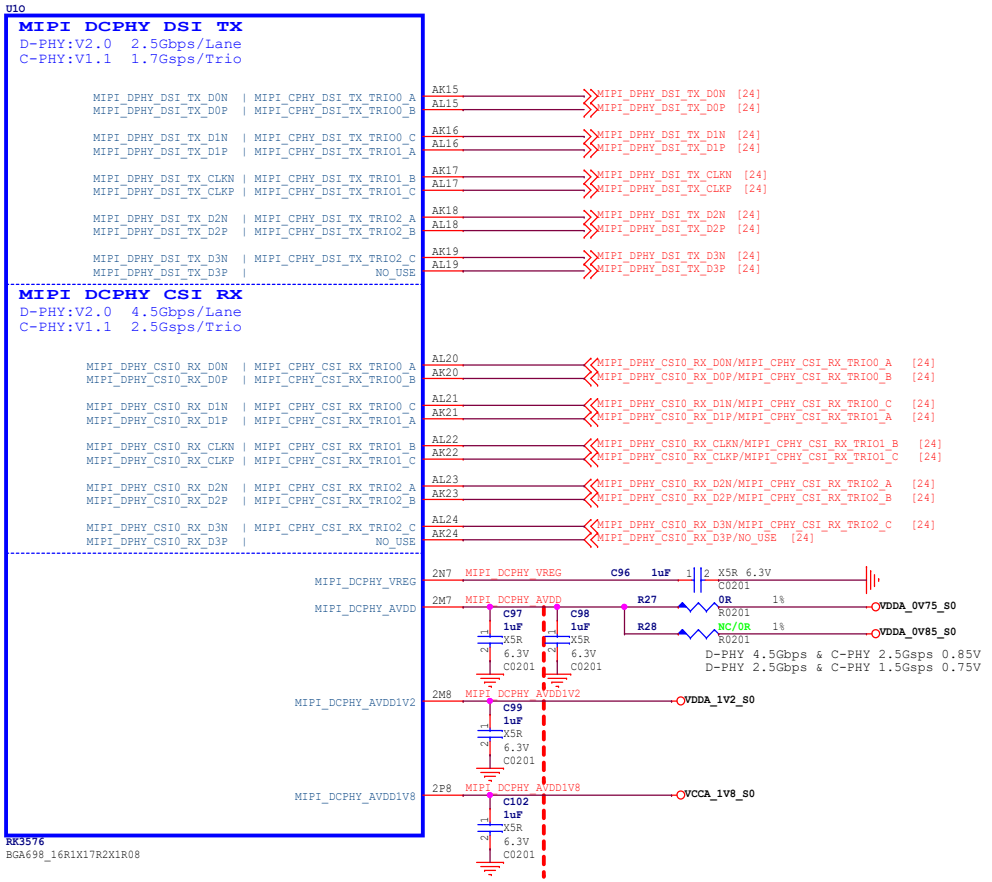

Note:
Caps of between dashed red lines and U1000 should be placed under the U1000 package. Other caps should be placed close to the U1000 package

RK3576_P(MIPI DPHY CSI RX)

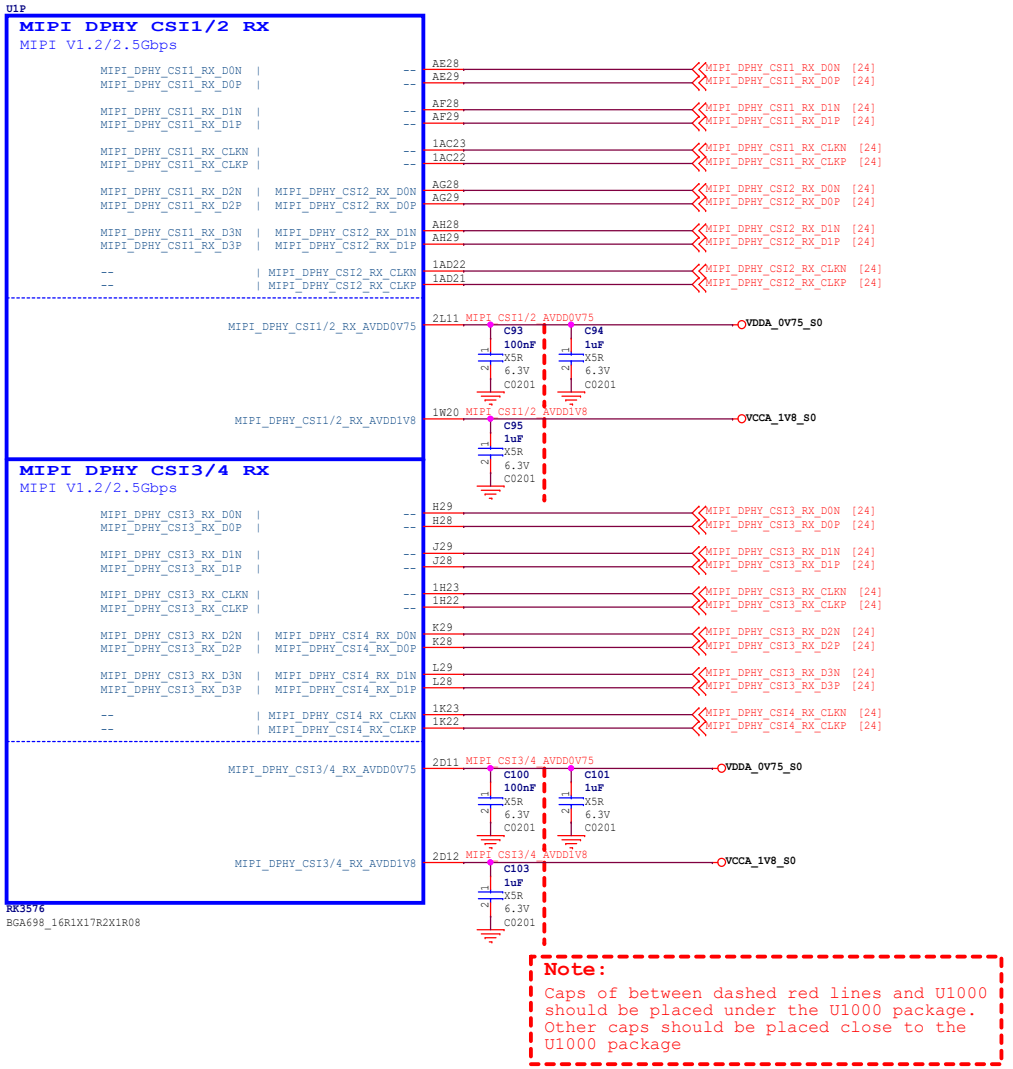


Note:
Caps of between dashed red lines and U1000 should be placed under the U1000 package. Other caps should be placed close to the U1000 package

Rockchip Confidential

Rockchip Electronics Co., Ltd					
Project:	DshanPI-A1-CM5				
File:	12.RK3576-MIPI DSI/CSI				
Date:	Friday, May 08, 2026			Rev:	V1.0
Designed by:	Wesley Huang	Reviewed by:		Sheet:	12 of 24

RK3576_Q(HDMI/eDP)

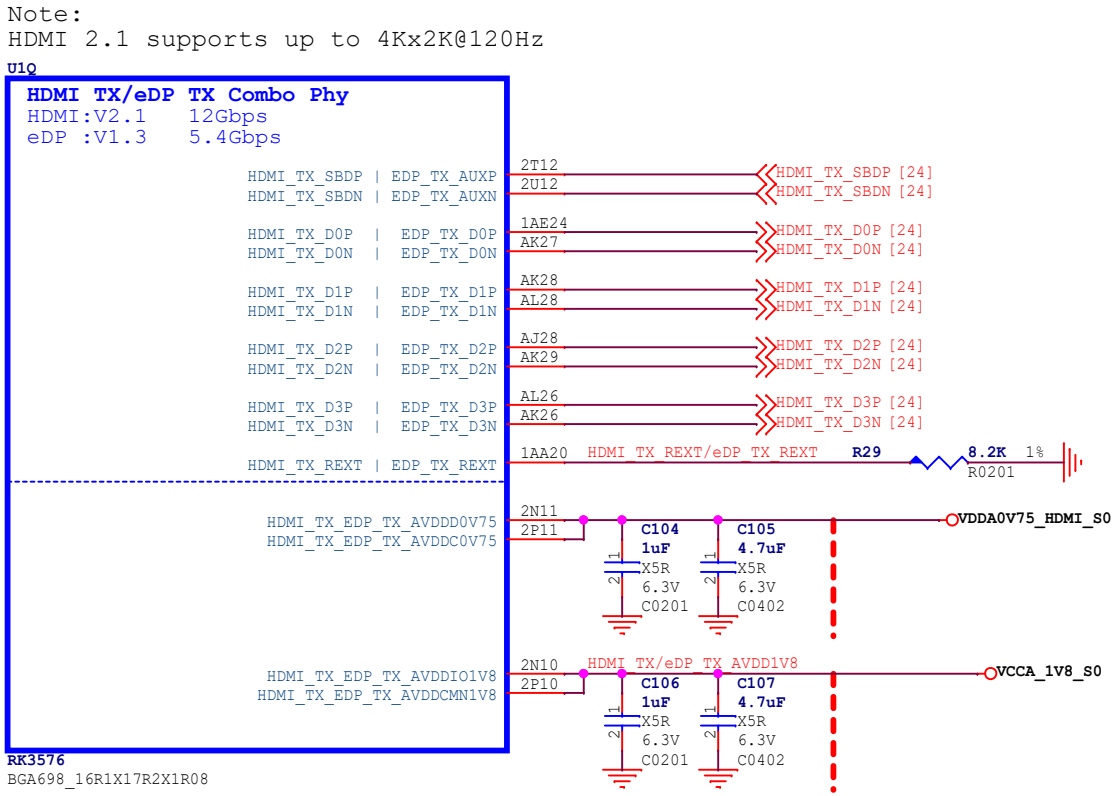


Note:
Caps of between dashed red lines and U1000 should be placed under the U1000 package. Other caps should be placed close to the U1000 package

Rockchip Confidential

Rockchip Electronics Co., Ltd			
Project:	DshanPI-A1-CM5		
File:	13.RK3576-HDMI/eDP		
Date:	Friday, May 08, 2026	Rev:	V1.0
Designed by: Wesley Huang	Reviewed by:	Sheet:	13 of 24

RK3576_N(PCIe/SATA/USB3)

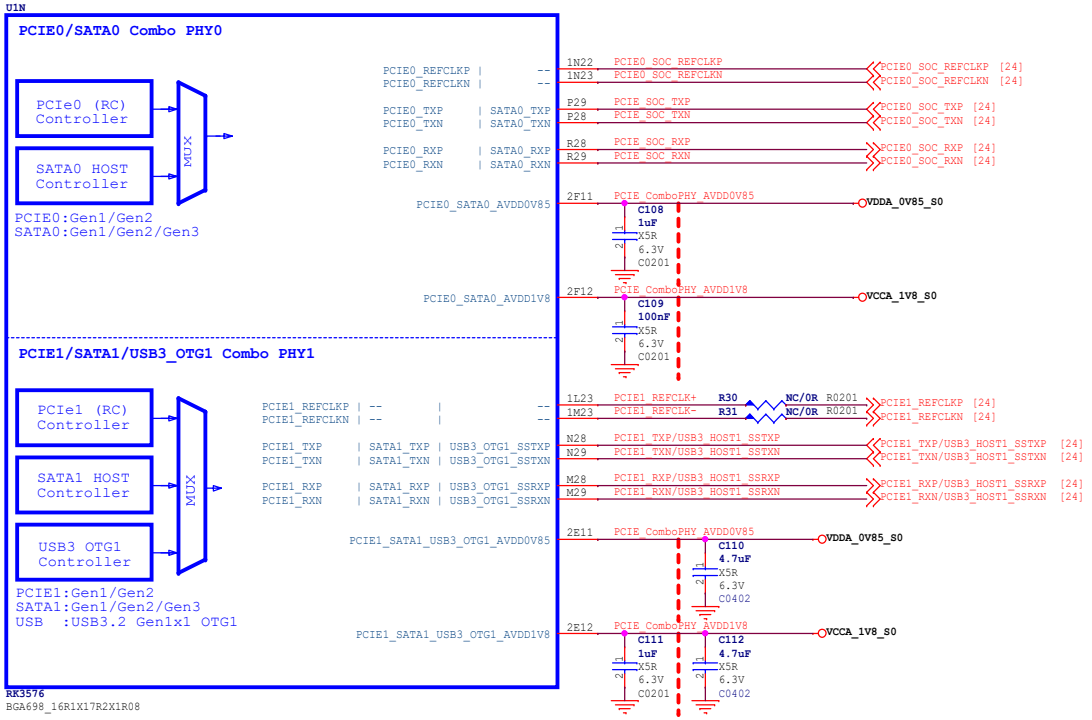

Note:
Caps of between dashed red lines and U1000 should be placed under the U1000 package. Other caps should be placed close to the U1000 package

Rockchip Confidential

Rockchip Electronics Co., Ltd					
Project:	DshanPI-A1-CM5				
File:	14.RK3576-PCIe/SATA/USB3				
Date:	Friday, May 08, 2026			Rev:	V1.0
Designed by:	Wesley Huang	Reviewed by:		Sheet:	14 of 24

RK3576_F(VCCIO2)

U1F

VCCIO2 Domain


Operating Voltage=1.8V/3.3V

PWM2_CH5_M0	--	--	--	--	AUPLL_CLK_IN_M2	SAI4_MCLK_M0	SAI1_MCLK_M0	GPIO4_A2_d
PWM2_CH4_M1	--	I2C2_SCL_M2	UART5_RTSN_M1	SPI3_CSN0_M2	FLEXBUS1_CSN_M4	--	SAI1_SCLK_M0	GPIO4_A3_d
CAN0_TX_M2	--	I2C4_SCL_M1	UART6_TX_M0	SPI3_MOSI_M2	FLEXBUS0_D13_M1	PDM1_SDI3_M1	SAI4_SCLK_M0	GPIO4_A4_d
--	PCIE1_CLKREQN_M2	I2C2_SDA_M2	UART5_CTSN_M1	SPI4_CSN1_M2	FLEXBUS1_D12_M1	--	SAI1_LRCK_M0	GPIO4_A5_d
CAN0_RX_M2	--	I2C4_SDA_M1	UART6_RX_M0	SPI3_MISO_M2	FLEXBUS0_D14_M1	PDM1_CLK0_M1	SAI4_LRCK_M0	GPIO4_A6_d
PWM2_CH8_M0	--	--	--	SPI3_CLK_M2	--	--	SAI4_SDI_M0	GPIO4_A7_d
--	UART2_RTSN_M1	UART6_RTSN_M0	UART5_TX_M1	SPI4_CLK_M2	FLEXBUS1_D13_M1	PDM1_CLK1_M1	SAI1_SDI3_M0	GPIO4_B0_d
--	UART2_CTSN_M1	UART6_CTSN_M0	UART5_RX_M1	SPI4_MOSI_M2	FLEXBUS1_D14_M1	PDM1_SDI2_M1	SAI1_SDI2_M0	GPIO4_B1_d
--	--	MIPI_TE_M0	--	SPI4_MISO_M2	FLEXBUS1_D15_M1	PDM1_SDI1_M1	SAI1_SDI1_M0	GPIO4_B2_d
PWM2_CH7_M0	--	--	SPI3_CSN1_M2	SPI4_CSN0_M2	--	PDM1_SDI0_M1	SAI4_SDO_M0	GPIO4_B3_d
CAN1_RX_M2	--	I2C3_SDA_M0	UART2_RX_M1	--	FLEXBUS0_CSN_M4	--	--	GPIO4_B4_d
CAN1_TX_M2	PCIE0_CLKREQN_M2	I2C3_SCL_M0	UART2_TX_M1	--	FLEXBUS0_D15_M1	--	--	GPIO4_B5_d

VCCIO2_VCC

RK3576

BGA698_16R1X17R2X1R08

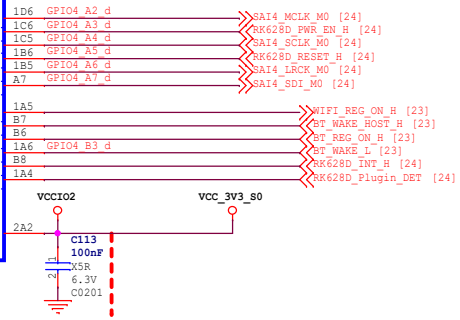

RK3576_G(VCCIO3)

U1G

VCCIO3 Domain

Operating Voltage=1.8V/3.3V


PWM1_CH0_M1	PCIE1_CLKREQN_M1	SPI1_CLK_M0	I2C9_SDA_M1	--	--	--	SAI3_SCLK_M1	--	SDMMC1_D0_M0	ETH1_RXD2_M1	GPIO1_B4_d
PWM1_CH1_M1	--	SPI1_MOSI_M0	I2C9_SCL_M1	--	--	--	SAI3_LRCK_M1	--	SDMMC1_D1_M0	ETH1_RXD3_M1	GPIO1_B5_d
--	PCIE0_CLKREQN_M1	SPI1_MISO_M0	--	UART3_CTSN_M2	--	--	SAI3_SDO_M1	--	SDMMC1_D2_M0	ETH1_RXCLK_M1	GPIO1_B6_d
--	--	SPI1_CSN0_M0	--	UART3_RTSN_M2	--	--	SAI3_SDI_M1	--	SDMMC1_D3_M0	ETH1_TXD2_M1	GPIO1_B7_d
PWM0_CH0_M1	--	SPI1_CSN1_M0	--	UART3_TX_M2	--	PDM0_SDI2_M2	--	--	SDMMC1_CMD_M0	ETH1_TXD3_M1	GPIO1_C0_d
--	--	--	--	UART3_RX_M2	--	PDM0_CLK0_M2	SAI3_MCLK_M1	--	SDMMC1_CLK_M0	ETH1_RXCLK_M1	GPIO1_C1_u
PWM1_CH4_M1	--	SPI2_CSN1_M1	I2C6_SCL_M1	UART4_RTSN_M1	--	--	--	FSPI1_CSN1_M1	FSPI1_RSTN_M1	SDMMC1_PWREN_M0	ETH1_PPSTRIG_M1	GPIO1_C2_u
--	--	SPI2_CSN0_M1	I2C6_SDA_M1	UART4_CTSN_M1	--	--	--	FSPI1_CSN0_M1	SDMMC1_DETN_M0	ETH1_PPSTRIG_M1	GPIO1_C3_u
--	PCIE0_BUTTONRSTN	SPI2_MOSI_M1	UART2_RTSN_M0	UART4_TX_M1	--	--	--	FSPI1_D0_M1	--	ETH1_RXD0_M1	GPIO1_C4_d
--	PCIE1_BUTTONRSTN	SPI2_MISO_M1	UART2_CTSN_M0	UART4_RX_M1	--	--	--	FSPI1_D1_M1	--	ETH1_RXD1_M1	GPIO1_C5_d
--	SATA_CPPOD	--	I2C8_SCL_M1	UART2_TX_M0	--	PDM0_SDI0_M2	--	FSPI1_D2_M1	--	ETH1_RXCTL_M1	GPIO1_C6_d
--	SATA_CPDET	--	I2C8_SDA_M1	UART2_RX_M0	--	PDM0_SDI1_M2	--	FSPI1_D3_M1	--	ETH1_RXD0_M1	GPIO1_C7_d
--	--	--	--	UART10_TX_M1	--	--	SAI2_SDO_M0	--	--	ETH1_RXD1_M1	GPIO1_D0_d
--	--	--	I3C0_SDA_PU_M1	UART10_RX_M1	--	--	SAI2_SCLK_M0	--	--	ETH1_RXCTL_M1	GPIO1_D1_d
PWM1_CH3_M1	--	--	I3C0_SCL_M1	--	--	--	SAI2_LRCK_M0	--	--	ETH1_MDC_M1	GPIO1_D2_d
PWM1_CH4_M1	--	--	I3C0_SDA_M1	--	--	--	SAI2_SDI_M0	--	--	ETH1_MDIO_M1	GPIO1_D3_d
--	--	--	I2C5_SCL_M1	UART10_RTSN_M1	SPDIF_RX1_M2	PDM0_SDI3_M2	SAI2_MCLK_M0	--	--	ETH1_MCLK_M1	GPIO1_D4_d
CLK1_32K_OUT	SATA_MPSWITCH	SPI2_CLK_M1	I2C5_SDA_M1	UART10_CTSN_M1	SPDIF_TX1_M2	PDM0_CLK1_M2	--	FSPI1_CLK_M1	--	ETH_CLK1_25M_OUT_M1	GPIO1_D5_d

VCCIO3_VCC

RK3576

BGA698_16R1X17R2X1R08

Note:
Caps of between dashed red lines and U1000 should be placed under the U1000 package. Other caps should be placed close to the U1000 package

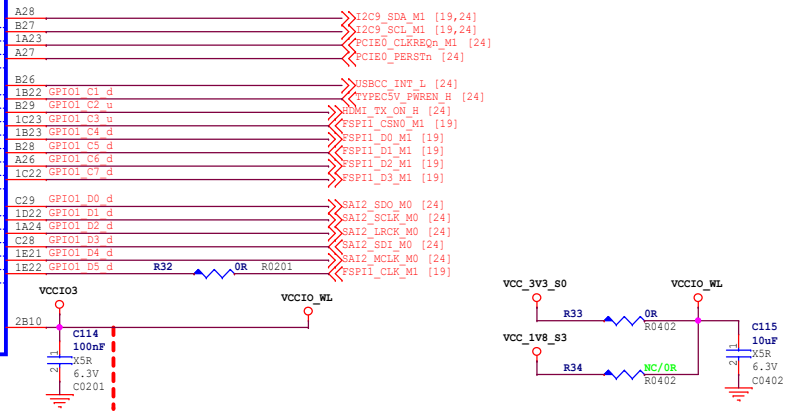

RK3576_J(VCCIO6)

U1J

VCCIO6 Domain


Operating Voltage=1.8V/3.3V

PWM1_CH5_M1	UART11_TX_M2	SPI4_CSN1_M0	I2C7_SCL_M3	--	HDMI_TX_CEC_M0	--	SAI4_MCLK_M2	DSM_AUD_LP_M1	GPIO4_C0_d
PWM0_CH1_M1	UART11_RX_M2	EDP_TX_HPDIN_M0	I2C7_SDA_M3	PCIE1_CLKREQN_M3	HDMI_TX_HPDIN_M0	--	--	DSM_AUD_LN_M1	GPIO4_C1_d
PWM2_CH0_M1	UART9_TX_M2	CAN0_TX_M1	I2C2_SCL_M3	--	HDMI_TX_SCL	--	--	DSM_AUD_RF_M1	GPIO4_C2_d
PWM2_CH1_M1	UART9_RX_M2	CAN0_RX_M1	I2C2_SDA_M3	--	HDMI_TX_SDA	--	--	DSM_AUD_RN_M1	GPIO4_C3_d
PWM2_CH6_M1	UART6_TX_M3	SPI4_CSN0_M0	I2C3_SCL_M3	DP_HPDIN_M0	--	--	SAI4_LRCK_M2	ISP_PRELIGHT_TRIG_M1	GPIO4_C4_d
PWM2_CH5_M1	UART6_RX_M3	SPI4_MOSI_M0	I2C3_SDA_M3	SATA1_ACTLED_M1	--	VP0_SYNC_OUT	SAI4_SDO_M2	ISP_FLASH_TRIGOUT_M1	GPIO4_C5_d
PWM2_CH2_M1	CAN1_TX_M1	SPI4_MISO_M0	I2C6_SCL_M3	SATA0_ACTLED_M1	PCIE0_CLKREQN_M3	VP1_SYNC_OUT	SAI4_SDI_M2	--	GPIO4_C6_d
PWM2_CH3_M1	CAN1_RX_M1	SPI4_CLK_M0	I2C6_SDA_M3	--	--	VP2_SYNC_OUT	SAI4_SCLK_M2	--	GPIO4_C7_d

VCCIO6_VCC

RK3576

BGA698_16R1X17R2X1R08



Rockchip Confidential

Rockchip	Rockchip Electronics Co., Ltd		
Project:	DshanPI-A1-CM5		
File:	15.RK3576-GPIO VCCIO2/3/6		
Date:	Friday, May 08, 2026	Rev:	V1.0
Designed by:	Wesley Huang	Reviewed by:	Sheet: 15 of 24

RK3576_H(VCCIO4)

U1H


VCCIO4 Domain

Operating Voltage=1.8V/3.3V

--	--	I2C4_SCL_M2	SPI4_CSN1_M3	UART8_TX_M1	--	SAI0_SDO0_M0	ETH0_RXD0_M1	SDMMC1_D0_M1	VI_CIF_D15	GPIO2_A6_d
--	--	I2C4_SDA_M2	--	UART8_RX_M1	--	SAI0_SDO1_M0	ETH0_TXCTL_M1	SDMMC1_D1_M1	VI_CIF_D14	GPIO2_A7_d
--	--	--	--	UART1_TX_M1	PDM0_SDI3_M3	SAI0_SDI0_M0	ETH0_TXD1_M1	SDMMC1_D2_M1	VI_CIF_D13	GPIO2_B0_d
--	--	--	--	UART1_RX_M1	PDM0_SDI2_M3	SAI0_SDI1_M0	ETH0_TXD0_M1	SDMMC1_D3_M1	VI_CIF_D12	GPIO2_B1_d
--	--	PCIE0_CLKREQN_M0	SPI4_CSN0_M3	UART1_CTSN_M1	PDM0_SDI1_M3	SAI0_SDI2_M0	ETH0_TXD3_M1	SDMMC1_CMD_M1	VI_CIF_D11	GPIO2_B2_d
--	--	PCIE1_CLKREQN_M0	SPI4_CLK_M3	UART1_RTSN_M1	PDM0_CLK1_M3	SAI0_SDO2_M0	ETH0_TXCLK_M1	SDMMC1_CLK_M1	VI_CIF_D10	GPIO2_B3_d
--	SATA0_ACTLED_M0	--	SPI4_MOSI_M3	UART7_CTSN_M0	PDM0_SDI0_M3	SAI0_SDI3_M0	ETH0_TXD2_M1	SDMMC1_PWREN_M1	VI_CIF_D9	GPIO2_B4_d
--	SATA1_ACTLED_M0	--	SPI4_MISO_M3	UART7_RTSN_M0	PDM0_CLK0_M3	SAI0_MCLK_M0	ETH0_RXCLK_M1	SDMMC1_DETN_M1	VI_CIF_D8	GPIO2_B5_d
--	--	I2C8_SCL_M2	UART8_RTSN_M1	UART7_TX_M0	--	SAI0_SCLK_M0	ETH0_RXD3_M1	ETH1_PTP_REFCLK_M1	VI_CIF_D7	GPIO2_B6_d
--	--	I2C8_SDA_M2	UART8_CTSN_M1	UART7_RX_M0	--	SAI0_LRCK_M0	ETH0_RXD2_M1	--	VI_CIF_D6	GPIO2_B7_d
PWM1_CH0_M2	--	--	--	UART9_RX_M0	PDM1_SDI1_M0	--	ETH0_PTP_REFCLK_M1	ETH1_RXD2_M0	VI_CIF_D5	GPIO2_C0_d
PWM1_CH1_M2	--	--	SPI1_CSN1_M1	UART9_TX_M0	PDM1_CLK1_M0	SAI2_MCLK_M1	ETH0_PPSCLK_M1	ETH1_RXD3_M0	VI_CIF_D4	GPIO2_C1_d
PWM1_CH2_M2	--	--	SPI1_MOSI_M1	UART11_CTSN_M1	PDM1_SDI2_M0	SAI2_SCLK_M1	ETH0_PPSTRIG_M1	ETH1_RXCLK_M0	VI_CIF_D3	GPIO2_C2_d
PWM0_CH0_M2	--	--	SPI1_MISO_M1	UART11_RTSN_M1	PDM1_SDI3_M0	SAI2_LRCK_M1	--	ETH1_RXD2_M0	VI_CIF_D2	GPIO2_C3_d
PWM1_CH3_M2	--	--	SPI1_CSN0_M1	UART11_TX_M1	PDM1_SDI0_M0	SAI2_SDO_M1	--	ETH1_RXD3_M0	VI_CIF_D1	GPIO2_C4_d
PWM0_CH4_M2	--	--	SPI1_CLK_M1	UART11_RX_M1	PDM1_CLK0_M0	SAI2_SDI_M1	--	ETH1_RXCLK_M0	VI_CIF_D0	GPIO2_C5_d
PWM0_CH5_M2	--	I2C5_SCL_M2	--	UART4_CTSN_M0	--	SAI4_SCLK_M3	--	ETH1_TXD0_M0	--	GPIO2_C6_d
PWM0_CH1_M2	--	I2C5_SDA_M2	--	UART4_RTSN_M0	--	SAI4_LRCK_M3	--	ETH1_TXD1_M0	--	GPIO2_C7_d
PWM2_CH0_M2	--	I2C6_SCL_M2	--	UART4_TX_M0	--	SAI4_SDI_M3	--	ETH1_TXCTL_M0	--	GPIO2_D0_d
PWM2_CH1_M2	--	I2C6_SDA_M2	--	UART4_RX_M0	--	SAI4_SDO_M3	--	ETH1_RXD0_M0	--	GPIO2_D1_d
PWM2_CH2_M2	I3C1_SCL_M0	--	--	UART6_TX_M1	--	SAI4_MCLK_M3	--	ETH1_RXD1_M0	CAM_CLKU_OUT_M1	GPIO2_D2_d
PWM2_CH3_M2	I3C1_SDA_M0	--	--	UART6_RX_M1	--	--	--	ETH1_RXCTL_M0	--	GPIO2_D3_d
PWM2_CH4_M2	--	I2C9_SDA_M2	--	UART6_RTSN_M1	--	--	--	ETH1_MDC_M0	ISP_PRELIGHT_TRIG_M0	GPIO2_D4_d
PWM2_CH5_M2	--	I2C9_SCL_M2	--	UART6_CTSN_M1	--	--	--	ETH1_MDIO_M0	ISP_FLASH_TRIGOUT_M0	GPIO2_D5_d
PWM2_CH6_M2	I3C1_SDA_PU_M0	--	--	UART9_RTSN_M0	SPDIF_RX0_M2	SAI3_MCLK_M2	ETH0_MCLK_M1	ETH_CLK1_25M_OUT_M0	CAM_CLK1_OUT_M1	GPIO2_D6_d
PWM2_CH7_M2	--	--	SPI3_CSN1_M0	UART9_CTSN_M0	SPDIF_TX0_M2	SAI0_SDO3_M0	ETH_CLK0_25M_OUT_M1	ETH1_MCLK_M0	CAM_CLK2_OUT_M1	GPIO2_D7_d
--	--	I2C7_SCL_M1	SPI3_CLK_M0	UART3_TX_M0	--	SAI3_SCLK_M2	ETH0_MDIO_M1	--	VI_CIF_HREF	GPIO3_A0_d
--	--	I2C7_SDA_M1	SPI3_MOSI_M0	UART3_RX_M0	--	SAI3_LRCK_M2	ETH0_MDC_M1	ETH1_PPSTRIG_M0	VI_CIF_VSYNC	GPIO3_A1_d
--	MIPI_TE_M1	CAN1_TX_M3	SPI3_MISO_M0	UART3_CTSN_M0	SPDIF_RX1_M1	SAI3_SDO_M2	ETH0_RXCTL_M1	ETH1_PPSCLK_M0	VI_CIF_CLKO	GPIO3_A2_d
--	--	CAN1_RX_M3	SPI3_CSN0_M0	UART3_RTSN_M0	SPDIF_TX1_M1	SAI3_SDI_M2	ETH0_RXD1_M1	ETH1_PTP_REFCLK_M0	VI_CIF_CLKI	GPIO3_A3_d

RK3576

BGA698_16R1X17R2X1R08

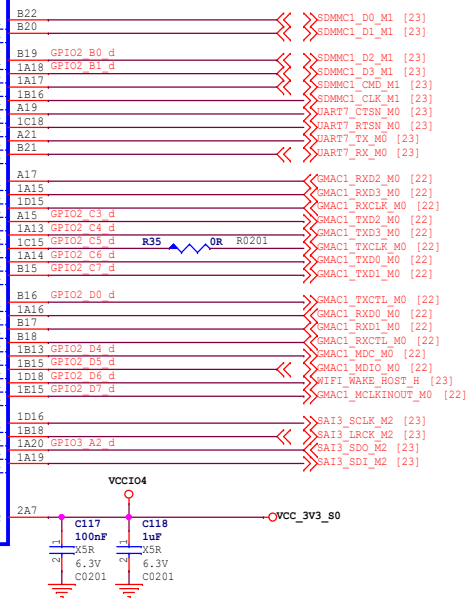

RK3576_I(VCCIO5)

U1I


VCCIO5 Domain

Operating Voltage=1.8V/3.3V

PWM1_CH0_M3	--	SPI2_CLK_M2	UART1_CTSN_M2	FLEXBUS0_CSN_M0	--	FLEXBUS1_D11	DSMC_RDYN	SAI4_SDI_M1	ETH_CLK0_25M_OUT_M0	VO_EBC_SDSHR	VO_LCDC_D23	GPIO3_A4_d
PWM1_CH1_M3	--	SPI2_CSN1_M2	UART1_RTSN_M2	--	--	FLEXBUS0_D7	DSMC_DATA15	PDM1_SDI3_M2	ETH0_MDIO_M0	VO_EBC_GDSE	VO_LCDC_D22	GPIO3_A5_d
PWM1_CH2_M3	--	UART10_CTSN_M0	UART1_RX_M2	--	--	FLEXBUS0_D6	DSMC_DATA14	PDM1_SDI2_M2	ETH0_MDC_M0	VO_EBC_GDOE	VO_LCDC_D21	GPIO3_A6_d
--	--	UART10_RTSN_M0	UART1_TX_M2	--	--	FLEXBUS0_D5	DSMC_DATA13	PDM1_CLK1_M2	ETH0_RXCTL_M0	VO_EBC_VCOM	VO_LCDC_D20	GPIO3_A7_d
PWM0_CH0_M3	--	SPI2_MOSI_M2	UART10_RX_M0	--	--	FLEXBUS0_D8	DSMC_CSN1	SAI4_MCLK_M1	ETH0_MCLK_M0	VO_EBC_SDCE3	VO_LCDC_D19	GPIO3_B0_d
PWM1_CH3_M3	--	SPI4_CSN0_M1	UART10_TX_M0	--	--	FLEXBUS0_D4	DSMC_DATA12	PDM1_CLK0_M2	ETH0_RXD1_M0	VO_EBC_SDCE2	VO_LCDC_D18	GPIO3_B1_d
--	I2C8_SDA_M3	--	UART9_RX_M1	--	--	FLEXBUS0_D3	DSMC_DATA11	PDM1_SDI1_M2	ETH0_RXD0_M0	VO_EBC_SDCE1	VO_LCDC_D17	GPIO3_B2_d
--	I2C8_SCL_M3	--	UART9_TX_M1	--	--	FLEXBUS0_D2	DSMC_DATA10	PDM1_SDI0_M2	ETH0_TXCTL_M0	VO_EBC_SDCE0	VO_LCDC_D16	GPIO3_B3_d
PWM1_CH4_M3	--	--	UART9_RTSN_M1	--	--	FLEXBUS0_D1	DSMC_DATA9	SPDIF_RX1_M0	ETH0_TXD1_M0	VO_EBC_SDDOI5	VO_LCDC_D15	GPIO3_B4_d
PWM1_CH5_M3	--	--	UART9_CTSN_M1	--	--	FLEXBUS0_D0	DSMC_DATA8	SPDIF_TX1_M0	ETH0_TXD0_M0	VO_EBC_SDDOI4	VO_LCDC_D14	GPIO3_B5_d
PWM0_CH1_M3	--	SPI1_CSN0_M1	--	--	--	FLEXBUS0_CLK	DSMC_DQS1	--	ETH0_TXCLK_M0	VO_EBC_SDDOI3	VO_LCDC_D13	GPIO3_B6_d
--	I2C4_SDA_M3	UART3_CTSN_M1	UART2_RX_M2	FLEXBUS1_CSN_M0	--	FLEXBUS1_D10	DSMC_DQS0	SAI1_SDI0_M1	ETH0_PPSTRIG_M0	VO_EBC_SDDOI2	VO_LCDC_D12	GPIO3_B7_d
--	I2C4_SCL_M3	UART3_RTSN_M1	UART2_TX_M2	--	--	FLEXBUS1_D9	DSMC_DATA7	SAI1_SDO3_M1	ETH0_PPSCLK_M0	VO_EBC_SDDO11	VO_LCDC_D11	GPIO3_C0_d
CAN0_RX_M3	I2C5_SDA_M3	SPI4_MISO_M2	UART11_RX_M0	--	--	FLEXBUS1_D8	DSMC_DATA6	SAI1_SDO2_M1	ETH0_PTP_REFCLK_M0	VO_EBC_SDDO10	VO_LCDC_D10	GPIO3_C1_d
CAN0_TX_M3	I2C9_SCL_M3	SPI4_MISO_M1	UART11_RTSN_M0	--	--	FLEXBUS1_D9	DSMC_INT1	SAI2_SCLK_M2	ETH0_RXD3_M0	VO_EBC_SDDO9	VO_LCDC_D9	GPIO3_C2_d
PWM2_CH1_M3	I2C9_SDA_M3	SPI4_MOSI_M1	UART11_CTSN_M0	FLEXBUS0_CSN_M2	--	FLEXBUS1_D10	DSMC_INT3	SAI2_LRCK_M2	ETH0_TXD2_M0	VO_EBC_SDDO8	VO_LCDC_D8	GPIO3_C3_d
CAN0_TX_M3	I2C5_SCL_M3	SPI2_CSN0_M2	UART11_TX_M0	--	--	FLEXBUS1_D7	DSMC_DATA5	SAI1_SDO1_M1	--	VO_EBC_SDDO7	VO_LCDC_D7	GPIO3_C4_d
PWM2_CH2_M3	--	SPI1_MISO_M2	UART8_RX_M0	--	--	FLEXBUS1_D6	DSMC_DATA4	SAI1_SDO0_M1	--	VO_EBC_SDDO6	VO_LCDC_D6	GPIO3_C5_d
--	--	SPI1_MOSI_M2	UART8_TX_M0	--	--	FLEXBUS1_D5	DSMC_DATA3	SAI1_LRCK_M1	--	VO_EBC_SDDO5	VO_LCDC_D5	GPIO3_C6_d
--	--	SPI1_CLK_M2	UART8_RTSN_M0	--	--	FLEXBUS1_D4	DSMC_DATA2	SAI1_SCLK_M1	--	VO_EBC_SDDO4	VO_LCDC_D4	GPIO3_C7_d
PWM2_CH3_M3	--	SPI1_CSN0_M2	UART8_CTSN_M0	--	--	FLEXBUS1_D3	DSMC_DATA1	SAI1_MCLK_M1	--	VO_EBC_SDDO3	VO_LCDC_D3	GPIO3_D0_d
--	I3C1_SDA_PU_M2	SPI4_CLK_M1	--	FLEXBUS1_CSN_M2	--	FLEXBUS0_D11	DSMC_CSN2	SAI2_MCLK_M2	ETH0_RXCLK_M0	VO_EBC_SDDO2	VO_LCDC_D2	GPIO3_D1_d
PWM2_CH4_M3	I3C1_SDA_M2	SPI4_CSN1_M1	UART2_RTSN_M2	FLEXBUS0_CSN_M3	FLEXBUS1_D15_M0	FLEXBUS0_D12	DSMC_CSN3	SAI2_SDI_M2	ETH0_RXD3_M0	VO_EBC_SDDO1	VO_LCDC_D1	GPIO3_D2_d
PWM2_CH5_M3	I3C1_SCL_M2	--	UART2_CTSN_M2	--	--	FLEXBUS1_D2	DSMC_CSN0	SAI2_SDO_M2	ETH0_RXD2_M0	VO_EBC_SDDO0	VO_LCDC_D0	GPIO3_D3_d
--	I2C3_SCL_M2	SPI3_CLK_M1	UART5_RX_M0	--	--	FLEXBUS1_D1	DSMC_DATA0	SAI1_SDI1_M1	--	VO_EBC_SDLE	VO_LCDC_DEN	GPIO3_D4_d
--	I2C3_SDA_M2	SPI3_MISO_M1	UART5_TX_M0	--	--	FLEXBUS1_D0	DSMC_CLKP	SAI1_SDI2_M1	--	VO_EBC_GDCLK	VO_LCDC_HSYNC	GPIO3_D5_d
PWM2_CH6_M3	--	SPI3_MOSI_M1	UART5_CTSN_M0	--	--	FLEXBUS1_CLK	DSMC_CLKN	SAI1_SDI3_M1	--	VO_EBC_SDCLK	VO_LCDC_VSYNC	GPIO3_D6_d
PWM2_CH7_M3	--	SPI3_CSN1_M1	UART5_RTSN_M0	FLEXBUS1_CSN_M1	FLEXBUS1_D12_M0	FLEXBUS1_D15_M0	DSMC_RESETN	SAI4_SCLK_M1	CAM_CLK0_OUT_M0	VO_EBC_SDOE	VO_LCDC_CLK	GPIO3_D7_d
MIPI_TE_M2	I2C7_SCL_M2	SPI1_CSN1_M2	UART3_TX_M1	FLEXBUS1_CSN_M3	FLEXBUS1_D14_M0	FLEXBUS0_D13_M0	DSMC_INT0	SAI4_LRCK_M1	CAM_CLK1_OUT_M0	SPDIF_RX0_M1	--	GPIO4_A0_d
--	I2C7_SDA_M2	--	UART3_RX_M1	FLEXBUS0_CSN_M1	FLEXBUS1_D13_M0	FLEXBUS0_D14_M0	DSMC_INT2	SAI4_SDO_M1	CAM_CLK2_OUT_M0	SPDIF_TX0_M1	VO_POST_EMPTY	GPIO4_A1_d

RK3576

BGA698_16R1X17R2X1R08

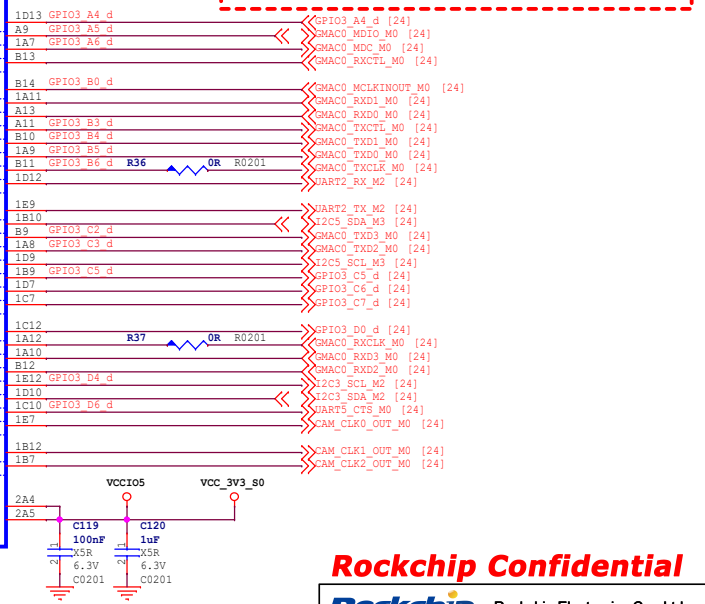


Note:


Caps of between dashed red lines and U1000 should be placed under the U1000 package. Other caps should be placed close to the U1000 package


Rockchip Confidential

Rockchip	Rockchip Electronics Co., Ltd		
Project:	DshanPI-A1-CM5		
File:	16.RK3576-GPIO VCCIO4/5		
Date:	Friday, May 08, 2026	Rev:	V1.0
Designed by:	Wesley Huang	Reviewed by:	Sheet: 16 of 24

LPDDR4/4X

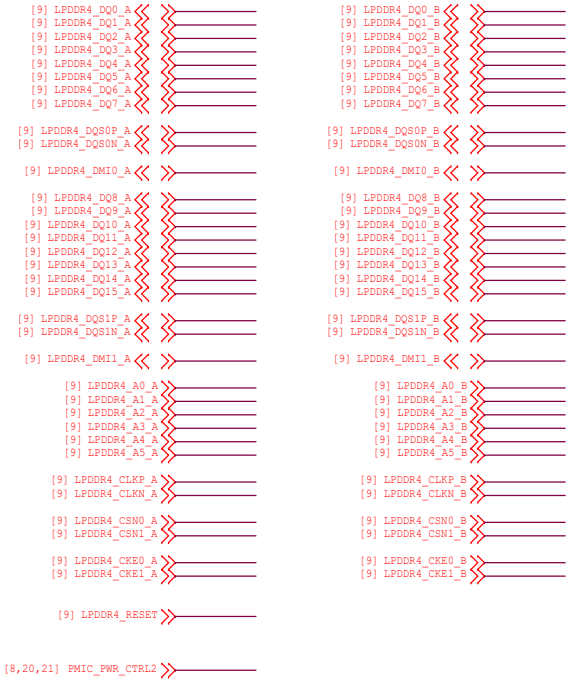

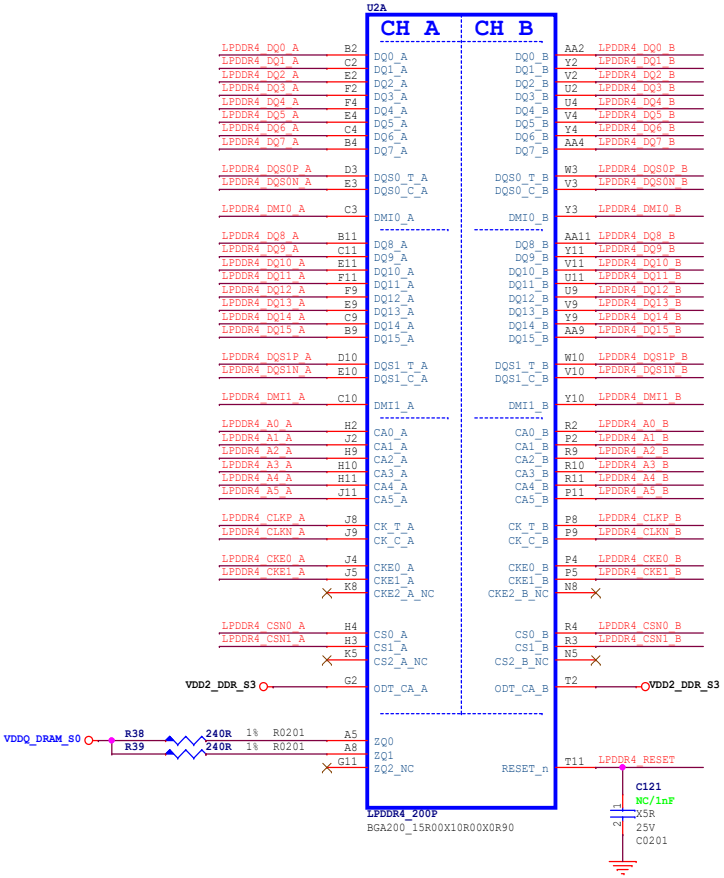


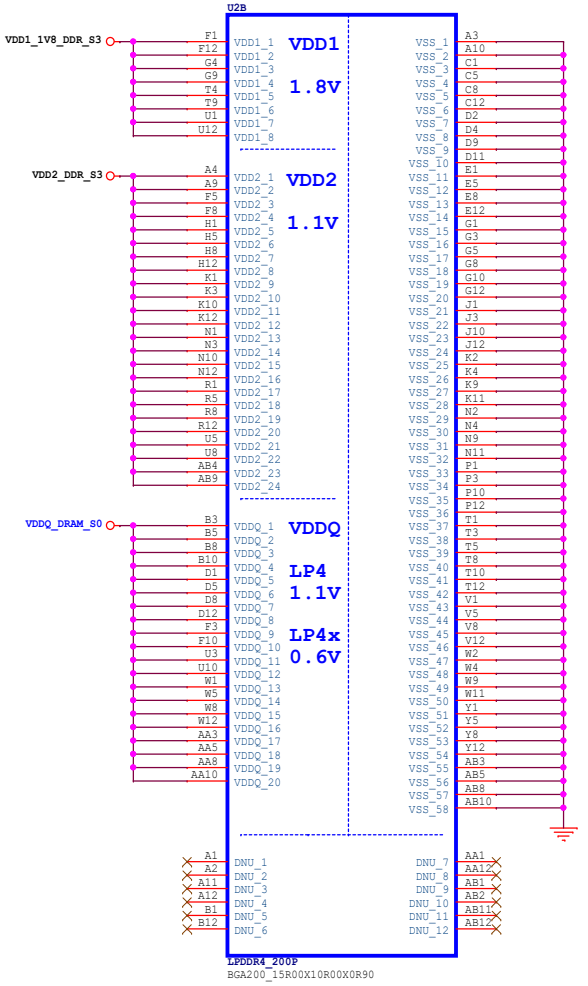


Note:

Sequence:VDD1-VDD2-VDDQ


	LPDDR4	LPDDR4X
VDD1:	1.70-1.95	1.70-1.95
VDD2:	1.06-1.17	1.06-1.17
VDDQ:	1.06-1.17	0.57-0.65

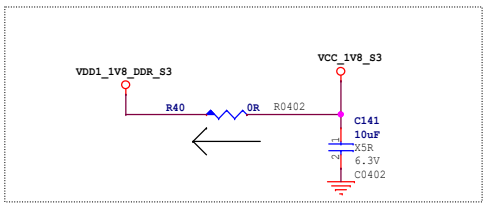


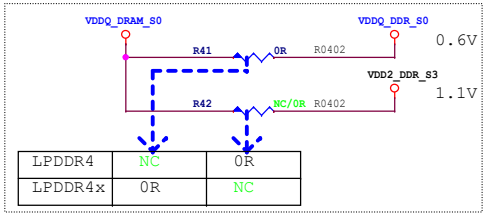


LPDDR4	NC	0R
LPDDR4x	0R	NC



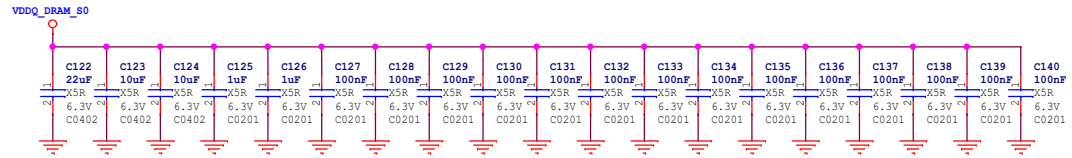

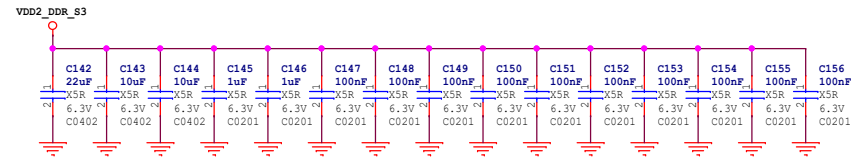


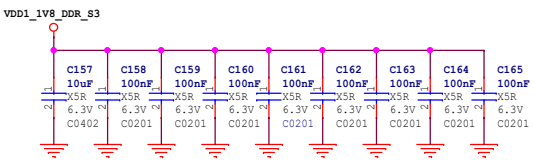

Rockchip Confidential

Rockchip	Rockchip Electronics Co., Ltd
Project:	DshanPI-A1-CM5
File:	17.DRAM-LPDDR4X_1X32bit_200P
Date:	Friday, May 08, 2026
Rev:	V1.0
Designed by:	Wesley Huang
Reviewed by:	
Sheet:	17 of 24

eMMC FLASH

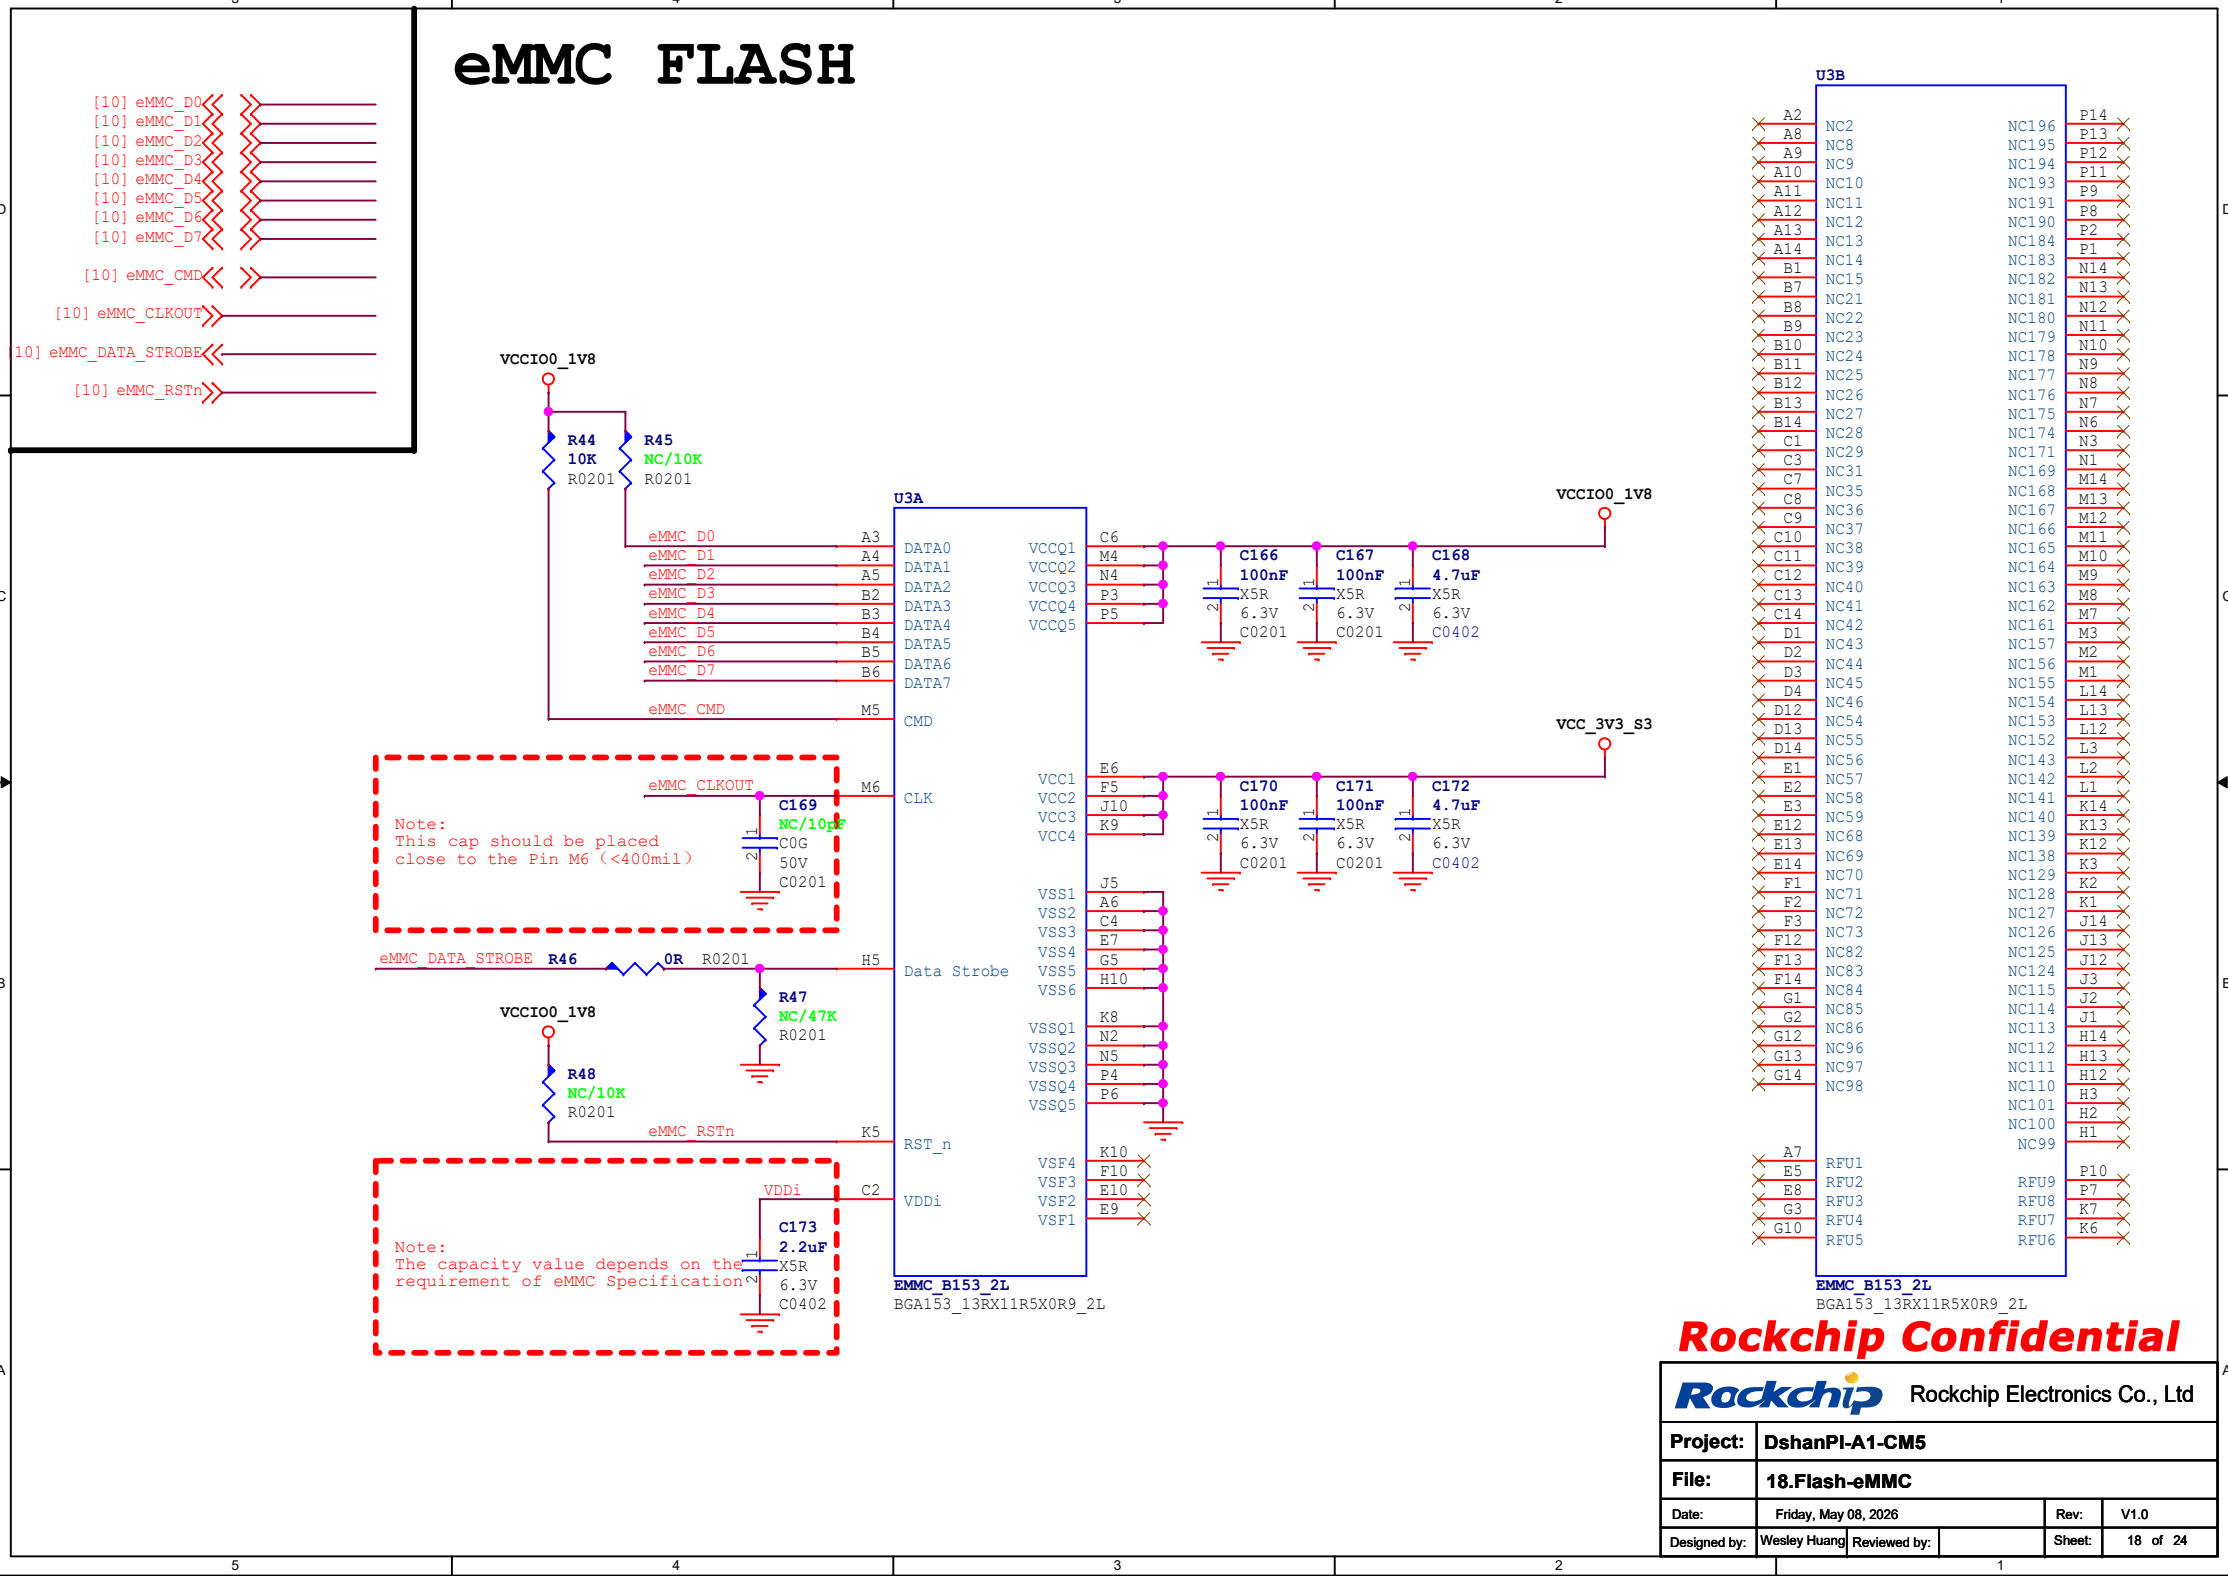



Rockchip Confidential

Rockchip Electronics Co., Ltd			
Project:	DshanPI-A1-CM5		
File:	18.Flash-eMMC		
Date:	Friday, May 08, 2026	Rev:	V1.0
Designed by: Wesley Huang	Reviewed by:	Sheet:	18 of 24

SPI Flash









Title	<Title>	
Size A3	Document Number <Doc>	Rev <RevCode>
Date: Friday, May 08, 2026	Sheet 19 of 24	


PMIC RK806S-5 BUCK

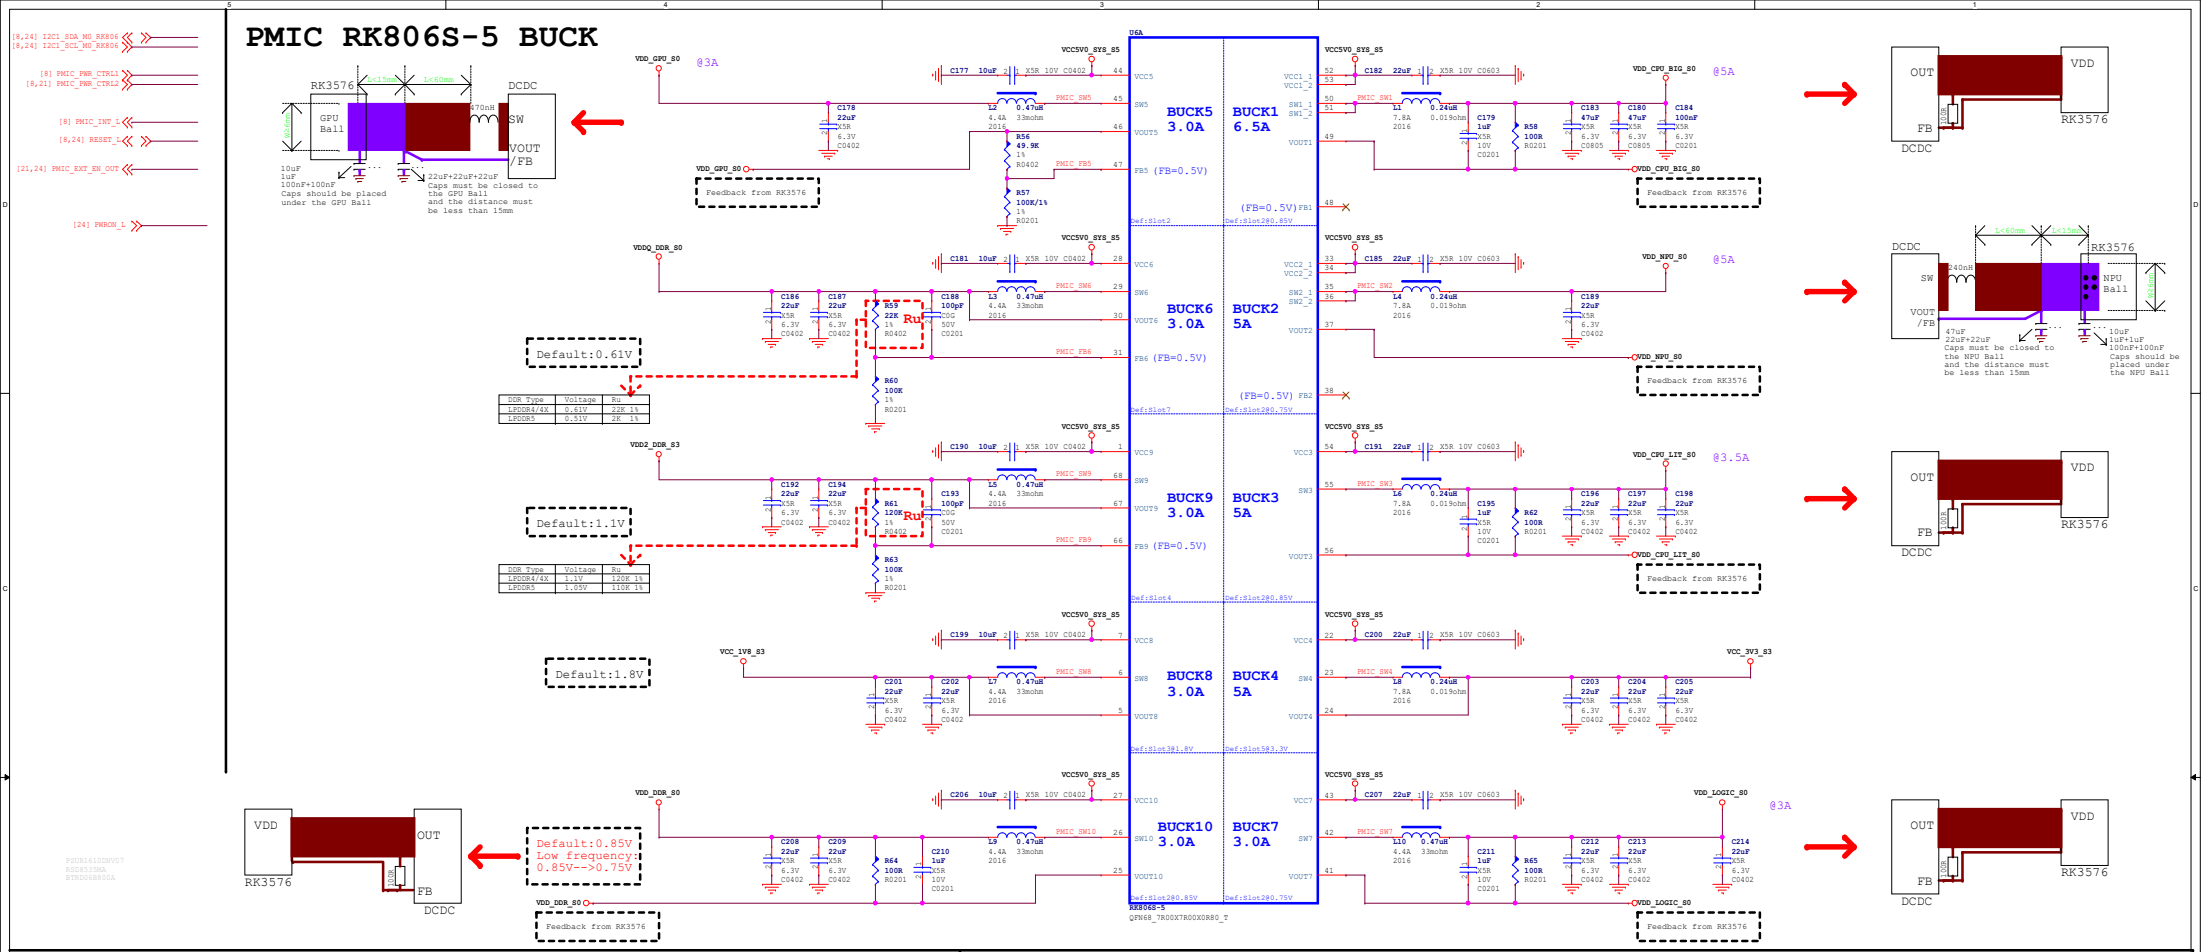

PMIC RK806S-5 Managerment

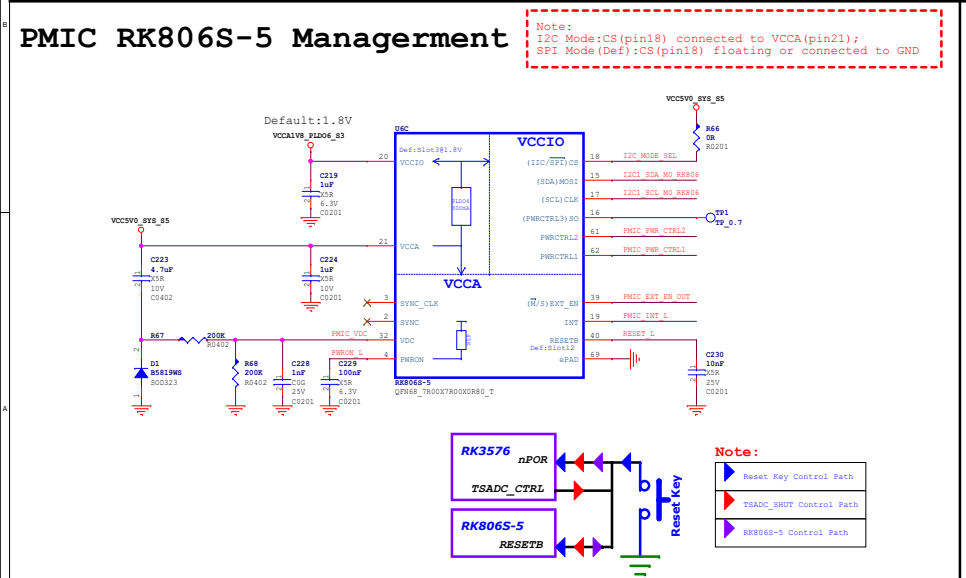

PMIC RK806S-5 LDO

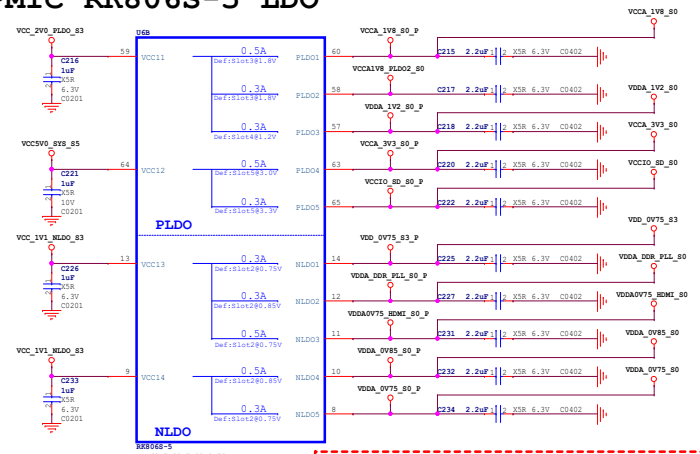


Note:

The RK806 LDO power distribution of the reference chematics is only suitable for the interface used in the reference schematics.
If other interface functions are to be added to the reference schematics, the RK806 LDO distribution needs to be re evaluated, otherwise the added functions may exceed the maximum current provided by the LDO

Rockchip Confidential

Rockchip	Rockchip Electronics Co., Ltd
Project:	DshanPI-A1-CM5
File:	20.Power-PMIC RK806S-5
Date:	Friday, May 08, 2026
Rev:	V1.0
Designed by:	Wesley Huang
Reviewed by:	
Sheet:	20 of 24


VCC_2V0_PLDO_S3

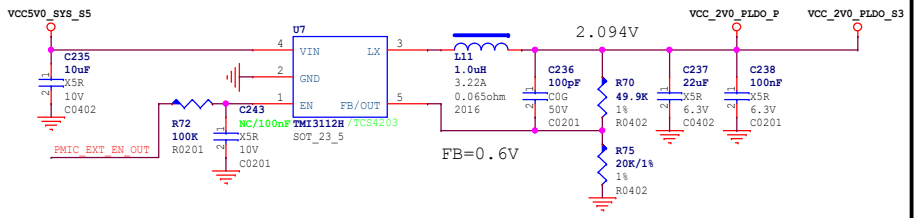


[8,20,21] PMIC_PWR_CTRL2

[20,24] PMIC_EXT_EN_OUT

VCC_1V1_NLDO_S3

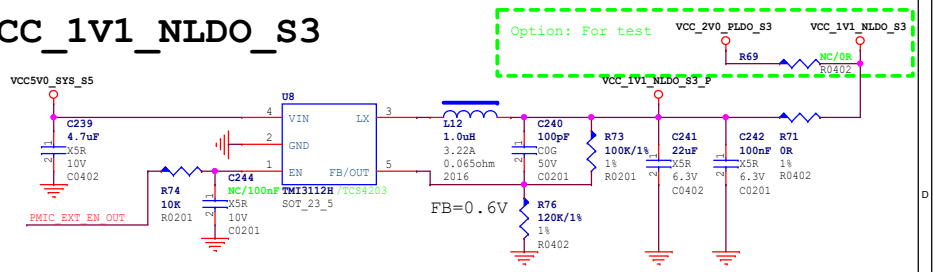


VCC_3V3_S0

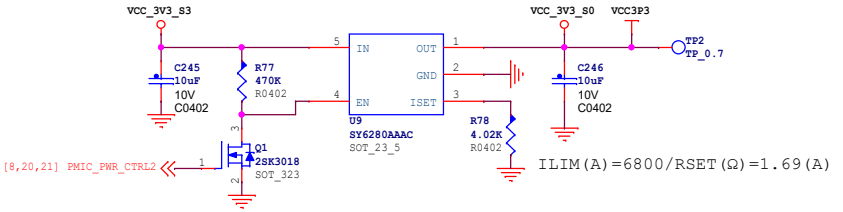

VCC_3V3_S0:
休眠状态下断电
VCC_3V3_S3:
休眠状态下保持上电

VCC_1V8_S0

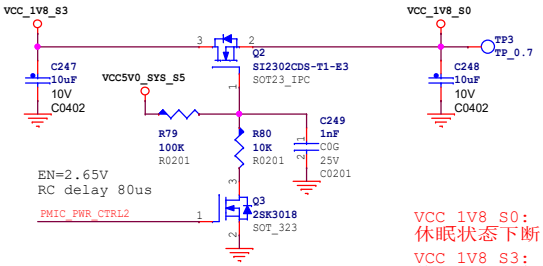


VCC_1V8_S0:
休眠状态下断电
VCC_1V8_S3:
休眠状态下保持上电

[8,24] SARADC_VIN0_BOOT


SARADC_VIN0_BOOT

MASKROM



Rockchip Confidential


Rockchip	Rockchip Electronics Co., Ltd				
Project:	DshanPI-A1-CM5				
File:	21.Power-Ext Discrete/MASKROM				
Date:	Friday, May 08, 2026			Rev:	V1.0
Designed by:	Wesley Huang	Reviewed by:		Sheet:	21 of 24

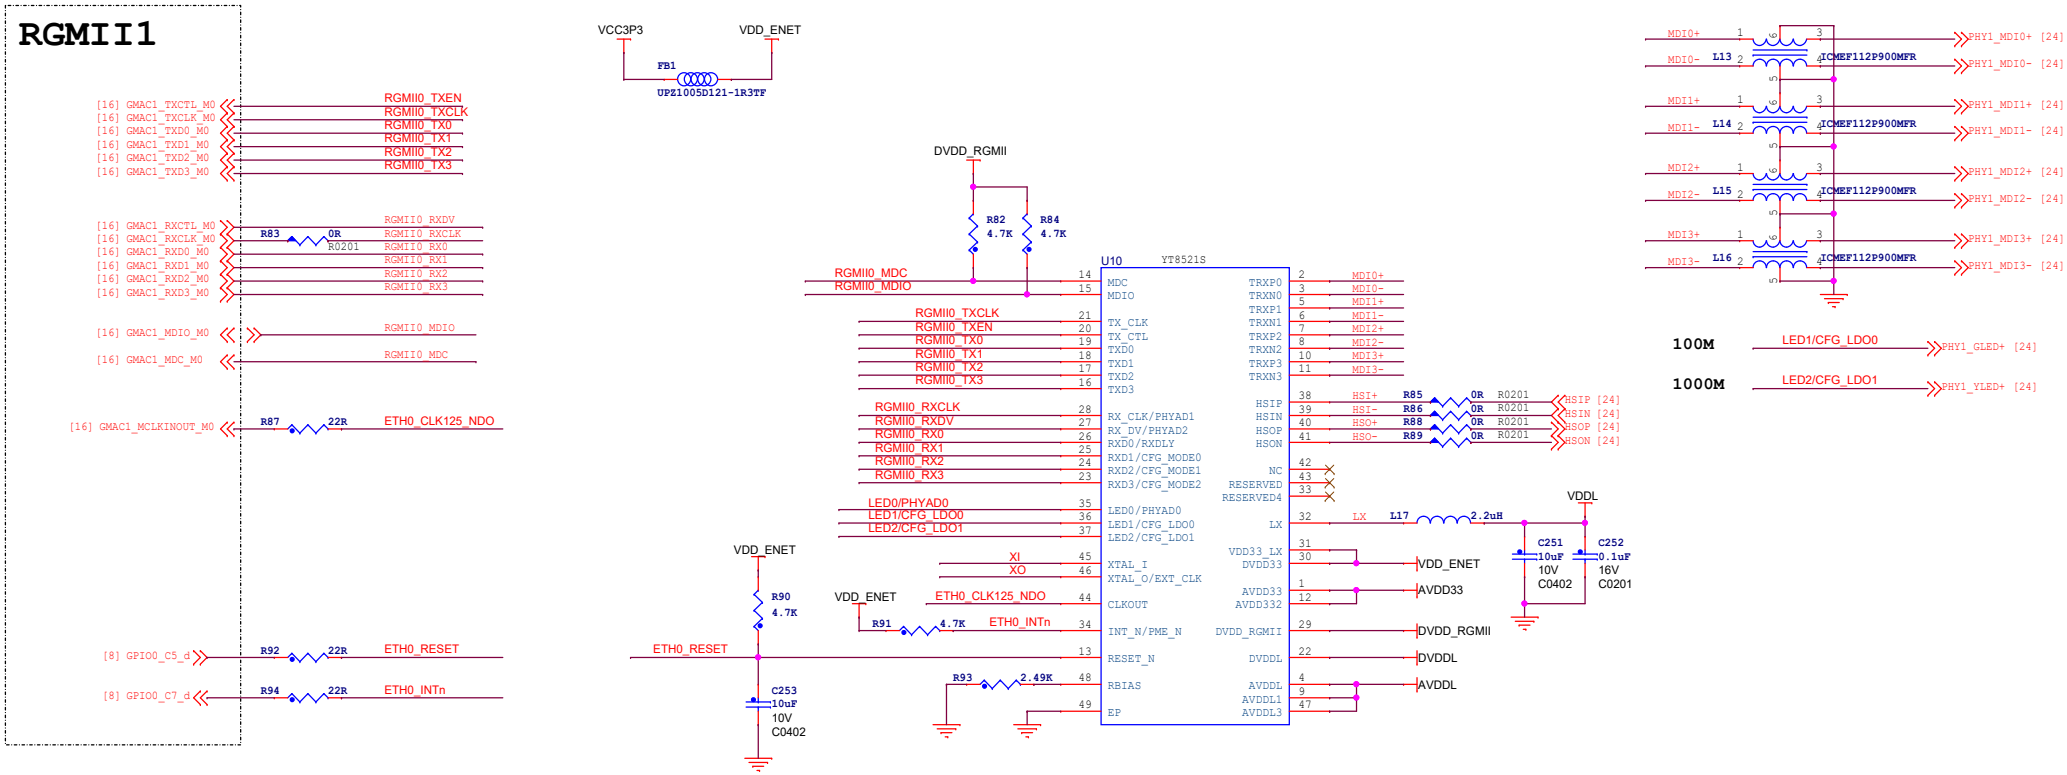


RXD[3:1]	Operation Mode
3'b000	UTP <=> RGMII
3'b001	FIBER <=> RGMII
3'b010	UTP/FIBER <=> RGMII
3'b011	UTP <=> SGMII
3'b100	SGMII (PHY) <=> RGMII
3'b101	SGMII (MAC) <=> RGMII
3'b110	UTP <=> FIBER (AUTO)
3'b111	UTP <=> FIBER (FORCE)


RXD0	RX_CLK Delay Control
Pull-up	Add 2ns delay on RX_CLK
Pull-down	Disable delay


CFG_LDO[1:0]	RGMII Voltage Selection
2'b00	External 3.3V
2'b01	Internal 2.5V
2'b10	Internal 1.8V
2'b11	Not Available

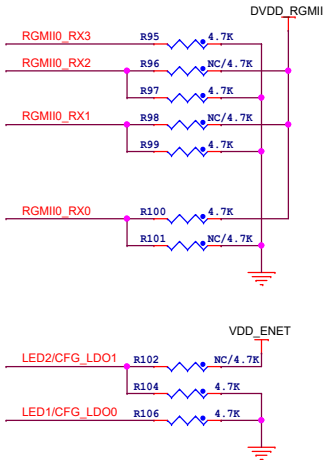




DEFAULT PHYADDR = 00000




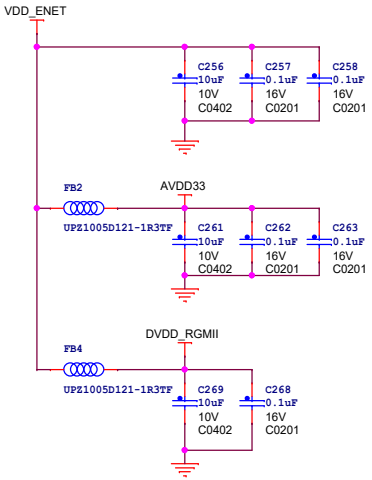

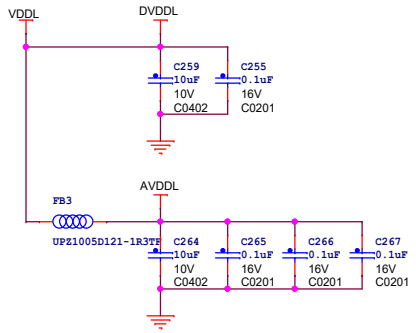


Title	<Title>		
Size A3	Document Number <Doc>		Rev <RevCode>
Date: Friday, May 08, 2026	Sheet 22 of 24		

WiFi/BT

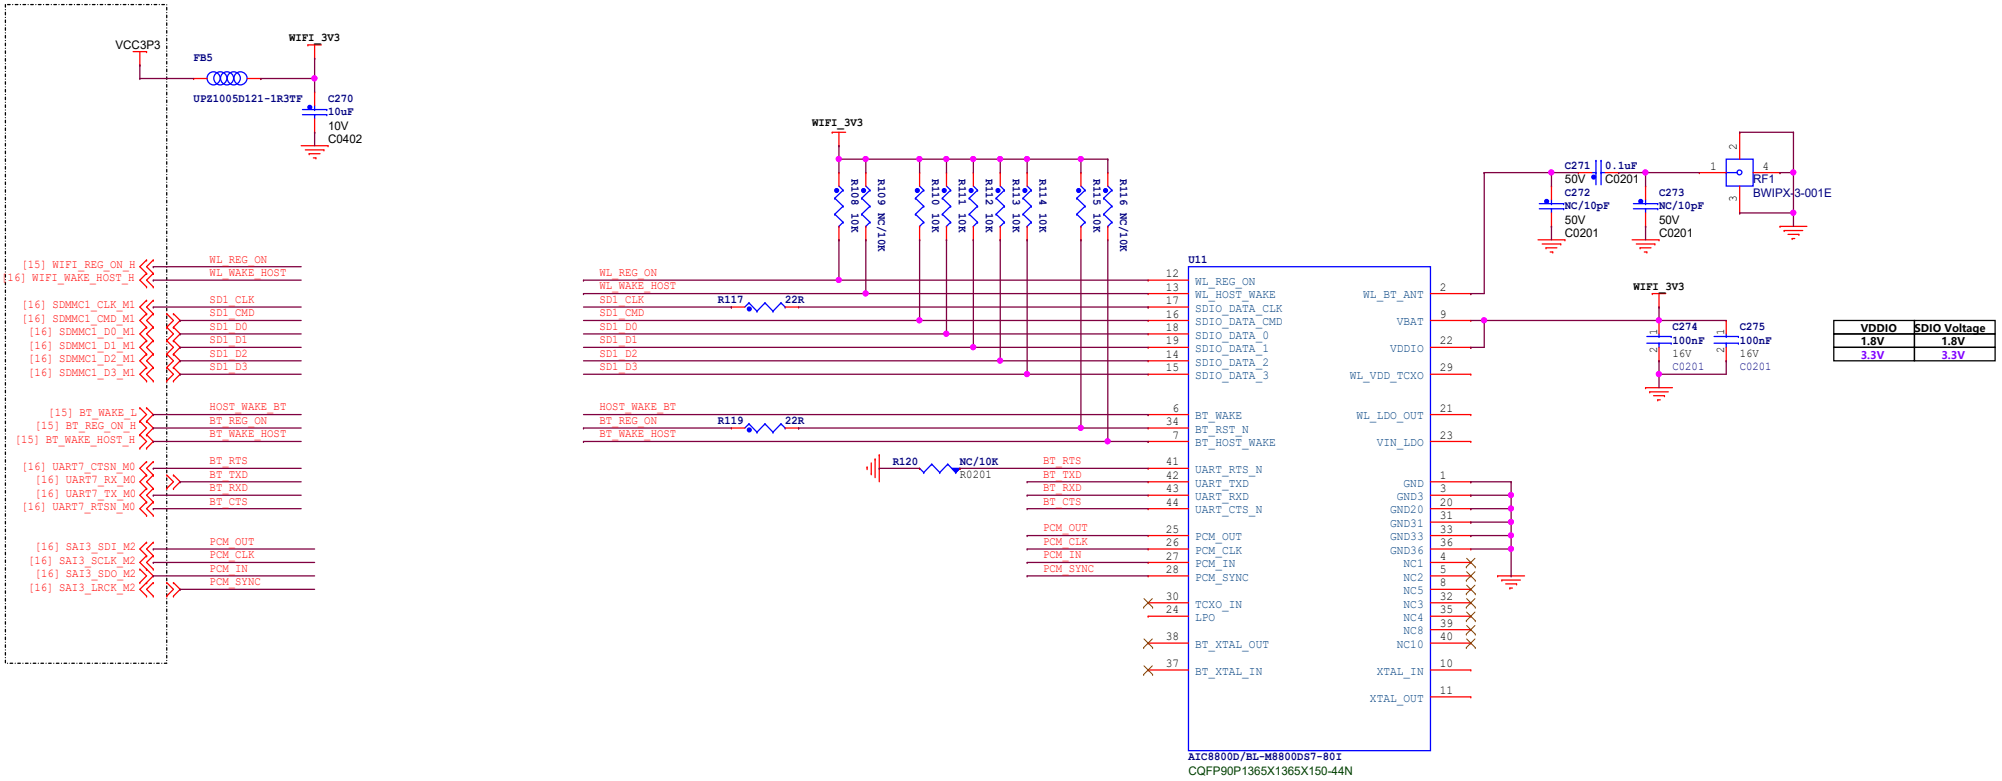


Title	<Title>		
Size A3	Document Number <Doc>		Rev <RevCode>
Date: Friday, May 08, 2026	Sheet 23 of 24		

PIN1~PIN100
CM5_Low Speed

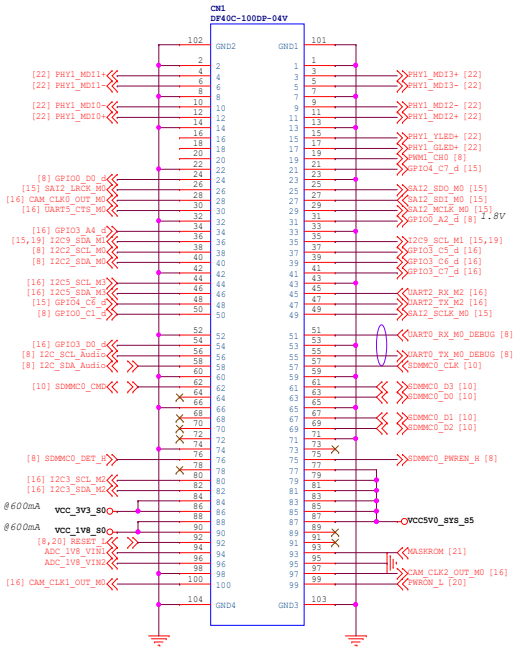

PIN101~PIN200
CM5_High Speed

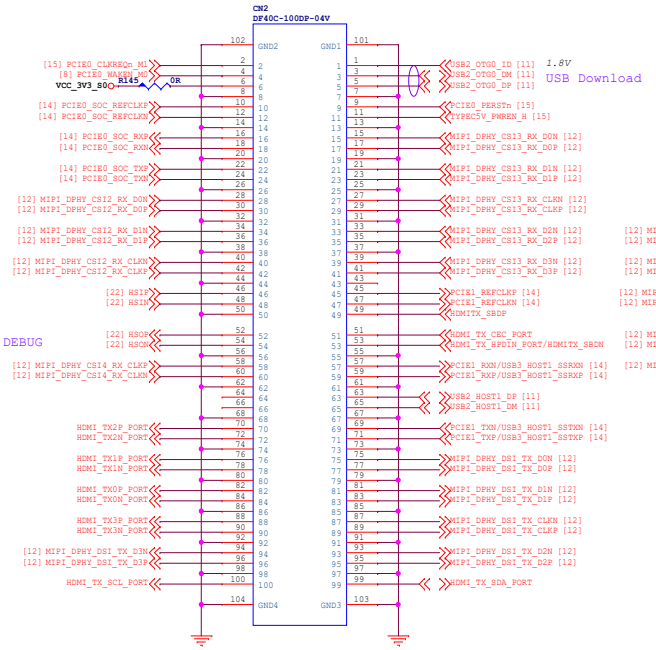


Extended I/O



UART DEBUG

HDMI

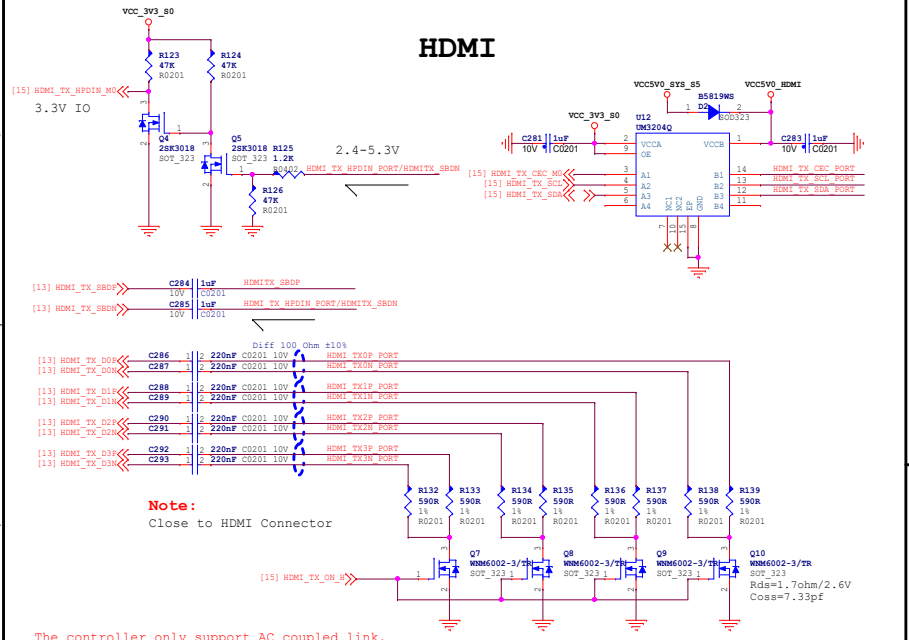


Note:
Close to HDMI Connector


The controller only support AC coupled link.
In order to backward compatibility or to meet HDMI2.0 (1.4b)
DC common mode spec and Voff, need do R based level-shift.

Switch on in HDMI2.0(TMDS) mode
Switch off in HDMI2.1(FRL) mode.

UFS Detect

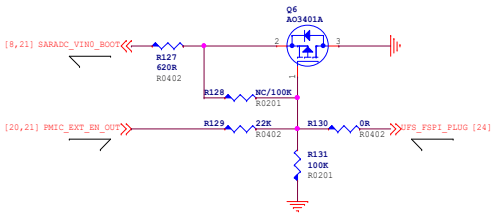


LED



ADC



HOLE



Vanxoak Wuhan Vanxoak Electronics Co., Ltd	
Project:	DshanPI-A1-CM5
File:	24.Interface
Date:	Friday, May 08, 2026
Rev:	<Revision>
Designed by:	<designer>
Reviewed by:	<Checker>
Sheet:	24 of 24